



GROUP 708 **HOT DIP**

Page **582**

GROUP 716 **SEALANTS AND ADHESIVES**

Page **582**

GROUP 721 **PAINTS**

Page **583**

GROUP 727 **CLEANING BATHS**

Page **584**

GROUP 727 **SOLVENT DEGREASERS**

Page **584**

GROUP 732 **CLEANER SPRAYS**

Page **585**

GROUP 732 **MAINTENANCE SPRAYS & LUBRICANTS**

Page **586 - 589**

GROUP 734 **MARKERS - PAINT**

Pages **590**

GROUP 740 **GREASES**

Page **591**

GROUP 741 **SECONDARY CONTAINMENT STORAGE**

Page **592 - 593**

GROUP 742 **SPILL RESPONSE**

Page **594 - 597**

GROUP 780 **HAND & SKIN CARE**

Pages **598**

GROUP 780 **CLEANING PRODUCTS**

Pages **599 - 601**

Section 7 Contents

Description	Group	Page
Cleaning Products	780	599 - 601
Cleaner Sprays	732	585
Cleaning Baths	727	584
Greases	740	591
Hand & Skin Care	780	598
Hot Dip Coatings	708	582
Maintenance Sprays & Lubricants	732	586 - 589
Markers - Paint	734	590
Paints	721	583
Sealants & Adhesives	716	582
Secondary Containment Storage	741	592 - 593
Solvent Degreasers	727	584
Spill Response	742	594 - 597

Lubricants & Chemical Products

Section 7
Product Groups
708 - 780



GROUP 708/716 HOT DIP COATINGS, SEALANTS & ADHESIVES

KENNEDY Protective Coating
 QUALITY INDUSTRIAL TOOLING **Red-Hot-Dip**

Hot dip strippable plastic coating moulds itself around the component or tool being coated to provide 100% coverage and protects against corrosion and impacts, for up to ten years. The component protected can be easily identified through the translucent coating. Simply removed by peeling it off, leaves behind a thin oil film to provide short term protection against corrosion. The removed protective dip can be reused. Never directly apply heat to melt the protective dip, always use with a suitable melting pot. Working temperature 130°C to 160°C (for optimum results 140°C to 145°C).



RD160
Red colour.

AD160
Amber colour.

Description (Bars)	Weight each	Order Code
RD160 Single Bar	0.50g	-0050K
RD160 Case (50)	25.00g	-0250K
AD160 Single Bar	0.50g	-0500K
AD160 Case (50)	25.00g	-0550K

Industrial Melting Pots



A range of melting pots which have been designed for industrial melting of waxes, glues and plastics etc. for coating, casting, protecting etc. The pots are electrically heated and thermostatically temperature controlled from 50°C to 200°C. Constructed from anodised aluminium with ceramic fibre insulation. Pots supplied with 2m cable and fused plug, lifting handle, double-wall heat-conserving lid, on/off switch and safety thermal cut-out. 220/240V as standard.



Capacity Litres	Capacity Pints	Internal Dimensions		Maximum Wattage	Order Code
		Diameter	Depth		
0.7	1.20	100 (mm)	90 (mm)	275	-1010K
2.5	4.40	150 (mm)	140 (mm)	600	-1030K
6.0	10.5	200 (mm)	190 (mm)	1125	-1060K

Lubricants & Chemical Products

Sealant Cartridge Applicator Guns

Economy Plastic Gun
Easy to use.




Accepts 310ml cartridges.

Type	Cartridge (max size)	Order Code
Plastic	310ml	-1200K

Standard Metal Gun

Robust and easy to use.

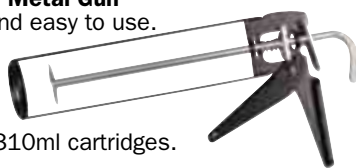

Accepts 310ml cartridges.

Type	Cartridge (max size)	Weight each	Order Code
Std.	310ml	435g	-1000K

Heavy Duty Metal Guns

Extremely robust and ideal for continuous use. Will not twist under pressure, ergonomically designed to reduce operator fatigue. Very smooth action for optimum application of sealant.



Heavy Duty Metal - 310ml



Heavy Duty Metal - 380ml

Type	Cartridge (max size)	Order Code
Heavy	310ml	-1400K
Duty	380ml	-2000K

SHERLOCK Silicone

General Purpose Silicone

High performance acetoxo silicone provides a permanently watertight flexible seal and offers excellent adhesive properties, making it suitable for use on glass, sanitary-ware, ceramics and non-porous surfaces. For indoor and outdoor use. Weather-proof. Mould-resistant. Life expectancy up to 25 years. Conforms to **BS 5889**. Size: 310ml cartridge.



Colour	Order Code
White	-3100K
Clear	-3110K
Lt Brown	-3120K
Black	-3130K
Grey	-3140K

Instant Nails

A high strength gap filling solvent-free adhesive that produces a quick 'grab' and replaces mechanical fixings in a multitude of home improvement applications. Dries white and is over-paintable when dry.



Size	Order Code
310ml	-6500K

P.T.F.E. Tape

Gas Type:
12mm x 5m roll. For gas and hot water pipes (not for potable water). Made to **BS EN 751:3**
Water Type:
12mm x 12m roll. For hot and cold water pipes. Made to **BS 6920 & BS 7786**



Description	Order Code
Gas	-8000K
Water	-9000K

* Other sizes available upon request. *

SOLENT Floor
MAINTENANCE™ Paint

Attractive and hard wearing, transforms drab, stained or scuffed concrete and similar surfaces. Suitable for floors in warehouses, workshops, shop floors, garages, basements, etc.

Storage and Use

Store at temperatures above 12°C. Apply in warm (above 15°C) well ventilated conditions. Easy to use, oil resistant and easy to clean. No primer required. Ideal for garages, workshops and laundry rooms.

Coverage: up to 8m² per litre (two coats recommended).

*Please note, colours are for guidance only.

5 Litre tin.



Colour	Order Code
Mid Grey	-2050E
Tile Red	-2100K
Mid Green	-2030C
Dark Grey	-2040D
Mid Blue	-2060F

Anti-Slip Floor Paint

Tuffgrip

Solvent free industrial quality floor paint. Applied by roller as a one-coat system, to provide traction in areas of slip hazard. Hard wearing, epoxy resin anti-slip coating suitable for use on heavy trafficked concrete, stone, steel and wooden floor surfaces.

Coverage: 5m² per pack.

*Please note, colours are for guidance only. 5 Litre tin.



Colour	Order Code
Mid Grey	-3050E
Safety Yellow	-3080H
Tile Red	-3100K



SOLENT MAINTENANCE™

Galvanising Spray - Cold Zinc

SZ1-500B

Fast drying corrosion protection. Matches colour of newly galvanised metal. Ideal for protecting welding joints in galvanised structures. Can be used as a top coat or primer. Compatible with most paint finishes. Contains no CFCs or lead. Fitted with directional spray button designed to assist application in outdoor locations with minimum over-spray.

Size: 500ml aerosol.



500ml

Product Number	Size	Order Code
SZ1-500B	500ml	-0900K

SITESAFE

Cold Galvanising Spray

CGA500

Fast drying corrosion protection. Matches colour of newly galvanised metal. Ideal for protecting welding joints in galvanised structures. Can be used as a top coat or primer. Compatible with most paint finishes. Contains no CFCs or lead. Fitted with directional spray button designed to assist application in outdoor locations with minimum over-spray.

Size: 500ml aerosol.



500ml

Product Number	Size	Order Code
CGA500	500ml	-3900K

SOLENT *Degreasing Station/
MAINTENANCE™ Parts Washer*

Air operated, strong and durable mild steel degreasing station. Ideal for use as a soaking bath and air agitation facility aids the degreasing process by removing heaviest oil and grime from small parts. Also comes with a flow through brush to deal with caked on grime. Designed to sit on 100L barrel.

Dimensions:

Length: 760mm (30").

Width: 510mm (20").

Height: 200mm (8").

Weight: 20.8kg.

Working height:

When on 100L drum = 890mm (35").

Solvent delivery: Flow through brush.

General: Powder coated bowl and galvanised splashback sheet.

Tray is mild steel.



Tray Material	Voltage	Order Code
Mild Steel	110V Parts Washer	-5110A
Mild Steel	240V Parts Washer	-5240A

Just Orange

Citrus Based Solvent Degreaser

Just Orange is a safe but powerful, citrus-based solvent degreaser. For the cleaning and degreasing of engineering components and equipment. Safely removes heavy oils, greases, bitumen, wet paints, adhesives and sealants from virtually all hard surfaces. Non-toxic, contains no CFCs. Reduced VOC. Inflammable. Non-hazardous for waste disposal. Can be used as a safer, environmentally friendly alternative to hazardous solvents such as acetone, benzene, butyl cellulose, CFCs, freon, glycol ethers, HCFCs, isopropyl alcohol, methyl ethyl, ketone, mineral spirits, toluene, trichloroethylene, xylene etc.



Orange Plus

Citrus Based Water Rinseable Degreaser

Orange Plus is a safe but powerful, citrus-based solvent degreaser. For the cleaning and degreasing of engineering components and equipment. Safely removes heavy oils, greases, bitumen, wet paints, adhesives and sealants from all metals, including plant and machinery, and some plastics. Non-toxic, contains no CFCs. Reduced VOC. Non-flammable. Non-hazardous for waste disposal. Can be used as a safer, environmentally friendly alternative to hazardous solvents such as Xylene, Toluene, Acetone etc.

Aqueous Orange

Citrus Based Aqueous Cleaner

Aqueous Orange is a highly concentrated citrus based blend of solvents and powerful surfactants will safely remove oils, greases etc from many hard surfaces. Designed to replace hazardous solvents such as white spirit and paraffin. It can be diluted with water for maximum economy and its micro-emulsion formula offers the benefits of both water based economy with solvent based efficiency. Contains biodegradable surfactants which enable it to break down naturally after disposal. Non-toxic, contains no CFCs. Negligible VOC. Non-flammable. Non-hazardous for easy waste disposal. Can be used as a safer, environmentally friendly alternative.



Size	Order Code
1ltr	-2800A
5ltr	-2810B
20ltr	-2820C



Size	Order Code
5ltr	-2910B
20ltr	-2920C



Size	Order Code
5ltr	-2610B
20ltr	-2620C

SITESAFE

Trike-free Contact Cleaner

CCA500C Electrical Contact Cleaner Spray - Trike-free

Suitable for cleaning and degreasing delicate components such as those used in electrical equipment. It can be used on most surfaces and will not effect PCBs, delicate plastics or painted surfaces. Non-corrosive. It contains only solvents which are permitted under the Montreal Protocol.

NEW



Product Number	Size	Order Code
CCA500C	500ml	-3120K

SOLENT MAINTENANCE Cleaner Spray

SC1-500B Industrial Rapid Dry Solvent Cleaner

Solvent Rapid Dry Solvent Cleaner is supplied in a large 500ml aerosol. The product is formulated to quickly penetrate grease, oil and general soiling from metal/electrical components and precision parts. The formulation rapidly evaporates leaving a clean, dry surface. Very effective at temperatures ranging from -5°C to 30°C. Safe on most plastic components. Will soften some lacquers. If in doubt about suitability test on a scrap component or a small area before general application. Size: 500ml.



Product Number	Size	Order Code
SC1-500B	500ml	-0100K

Cleaner Spray

SC2-500C Electrical Contact Cleaner Spray - Trike-free

An effective solvent based cleaner. The product is formulated to remove oil, grease and carbon dust from electrical switch gear and electronic components. It is safe on most common plastic parts, but will attack lacquer finishes and coatings. If in doubt about suitability, trial the product on a scrap sample first before general application. The product is propelled from the aerosol by CO₂ carbon dioxide gas (non-flammable). Electrical Switch Cleaner fluid is flammable. Always ensure power is switched off before applying this product to electrical equipment.



Product Number	Size	Order Code
SC2-500C	500ml	-0120K

Anti-Static Foam Cleaner

FCA500

This cleaner is recommended for the everyday cleaning of electronic and electrical equipment.

It removes stubborn stains, nicotine, grease and general grime build-up from plastic, formica, leatherette, ceramics, glass, paintwork or any other non-porous hard surface. Ideal for use in offices, canteens, banks, schools, kitchens, washrooms and many other problem areas. It has been formulated from surfactants and solvents which are safe to use on most surfaces.

Size: 500ml aerosol.

NEW



Container Type	Size	Order Code
Aerosol	500ml	-3180K

Foaming Spray

SC5-500B

Cuts through grease, dirt, oil and general soiling, contains no silicones. Ideal for non-porous surfaces. 1000+1 uses in the home, industry, garage or factory.

Size: 500ml aerosol.



Container Number	Size	Order Code
SC5-500B	500ml	-0180K

Multi-Purpose Oil Spray CO₂

SM3-500C

Excellent general-purpose lubricant. Clean, clear fluid suitable for domestic and industrial use. No reclaimed oil content. Formulated with strong anti-rust additives. No CFCs. No Silicone. No added extending solvent. Density: 0.862. Pour Point: -9°C. Flash point base oil: 214°C. Kinematic visc at 40°C: 20.9. Aniline point: 101°C.



Product Number	Aerosol Size	Order Code
SM3-500C	500ml	-0440K

Lubricants & Chemical Products

GROUP 732 MAINTENANCE SPRAYS & LUBRICANTS

KENNEDY Air Lube Oil
QUALITY INDUSTRIAL TOOLING

Excellent air release quality, low foaming ability and resists clogging. Contains anti-rust and anti-wear additives. Extremely resistant to water absorption and can be mixed with all mineral oil based lubricants without draining the system. Can be used on air tools.
ISO Grade VG22.



Container Type	Size	Order Code
Poly Bottle	500ml	-8000K

Multi-Purpose Oil Spray

General-purpose oil spray with anti-rust additives for excellent all-round performance. Ideal for lubricating locks, hinges, bicycle chains and pedals, lawn mowers, window slides, car aerials and sewing machines. Clean formulation suitable for domestic use and industrial use. CFC-free.



Container Type	Size	Order Code
Aerosol	200ml	-7820K
Aerosol	415ml	-7840K

CarPlan Car Care

Super De-Icer

Melts ice fast. Operates at -15°C . CFC-free.



For Zinc Galvanising Spray
See Group **721**

Product	Size	Order Code
De-icer	300ml	-2500K

Lubricants & Chemical Products

SITESAFE Penetrating Spray

POA500

Penetrating oil for dismantling, lubricating and cleaning. This oil displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and crevices to release and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces.

Size: 500ml aerosol.



NEW

Container Type	Size	Order Code
Aerosol	500ml	-3400K

SOLENT De-ionised Water DW25

For use in lead-acid car batteries. Also suitable for domestic appliances such as steam irons and steam cleaners. Avoids problems caused by scaling. Can be used as a final rinse in car washing to avoid 'spotting'. Also suitable for rinsing scientific glassware.



Size	Order Code
25ltr	-4250K

ACTION CAN Maintenance Liquid

AC-90

Displaces water, starts wet engines, penetrates rust, protects from corrosion, lubricates and stops squeaks. Silicone free, electrically non-conductive and can be used on or near electrical components, motor circuits etc, without affecting insulation or causing short circuits. Supplied in aerosols that use no CFCs and are ozone friendly or in screw top metal cans and drums. **Does Not Contain Kerosene*, Paraffin* or Naphtha*.** (*These products are used by some other maintenance sprays or water displacing sprays but are associated with skin drying and irritations.)



Product Number	Size	Order Code
Aerosol	250ml	-0050K
Aerosol	500ml	-0180K
Can	5ltr	-0200K
Drum	25ltr	-0250K
Applicator		-0500K



SOLENT MAINTENANCE Penetrating Spray

SM1-500B

Rapidly penetrates into rust and corroded fittings. Allows easy release and dismantling of fittings exposed to heat and great pressure. Can be used on wet metal components, does not contain Silicone, CFCs or Chlorine. Lubricates threads during release procedure, 30% less dense than water.

Size: 500ml aerosol.



Product Number	Size	Order Code
SM1-500B	500ml	SOL-732-0400K

Anti-Rust Protection Spray

SP1-500B - Green

Solent Green Moisture Guard is a soft thin film moisture/corrosion protective coating. Packed in a large 500ml aerosol. The coating has a slight green colouring which clearly indicates treated areas. Ideal for longer term moisture/ corrosion protection of machined components/ moulding dies and tools. Removed easily with Solent Industrial Cleaner, part number SC1-500B.

Size: 500ml aerosol.



Product Number	Size	Order Code
SP1-500B	500ml	SOL-732-0600K

Heavy Duty Anti-Rust Protection Spray

SP2-500B

Solent Heavy Duty Anti-Rust Protection Spray is supplied in a large 500ml aerosol. It is a high performance corrosion inhibitor. The product is sprayed directly onto the surface to be protected. Clear in colour with a faint yellow trace to identify treated surfaces. The film has self-healing properties and is easily removed with solvent cleaners. The coating will resist moisture, acid and alkali fumes. The film does not contain silicone or halogens. Corrosion protection periods vary with environmental conditions. Typical interior protection in the UK in excess of two years. Product can be re-applied should conditions require it.



Product Number	Size	Order Code
SP2-500B	500ml	SOL-732-0620K

Copper Grease Spray

SM7 500B - With Graphite

Components subjected to great heat and pressure during their operating life can easily be dismantled if Copper Grease is applied during assembly. Grease melts at high temperatures and disappears, but copper stays put. e.g. to lubricate the threads on exhaust assemblies etc. Copper grease spray is particularly effective on commercial and passenger vehicle braking systems. Extra heavy duty copper grease with graphite. High copper content - effective up to 1100°C. No lead content, no CFCs, no Silicone, no Chlorinated content. Fitted with directional spray button for precision application. Also ideal for boiler fittings that are subjected to high temperatures.



Product Number	Size	Order Code
SM7-500B	500ml	SOL-732-0520K

Maintenance Spray

SM4-500 'M4 Plus'

Lubricates: High performance mineral oil based lubricant with PTFE. **Displaces Water:** Helps start damp engines. **Penetrates:** Allows release of rusty fixings. **Cleans & Protects:** Cleans metal surfaces and prevents rusting of treated parts. Does not contain naphtha, kerosene or paraffin which are all associated with operator skin dryness, cracking or dermatitis. CO₂ non-flammable propellant. Does not contain silicone. Electrically non-conductive at normal ranges found in the home. Care must be taken if used on some electrical plastic components where 'crazing' may occur.



Product Number	Size	Order Code
SM4-500C	500ml	SOL-732-0460K

SITESAFE Leak Detector Spray

LDA500

For checking for the most minute leaks in any gas or air pressurised systems including commercial vehicle air brakes and pressure vessels. Contains no alcohols or solvents, is not caustic and contains a rust inhibitor. Spray directly onto the suspect area using the extension tube and examine for bubbling which will indicate leakage.

Size: 500ml aerosol.



Container Type	Size	Order Code
Aerosol	500ml	SSF-732-3340K

Lubricants & Chemical Products

SOLENT MAINTENANCE *Flaw Inspection System*

Fast reliable method for visually inspecting and spot-checking surfaces of welds, exotic alloys or standard metals, highly stressed structural members, critical castings, shafts, gears, spindles, and any other hard part where identification of surface flaws is essential. Detects flaws such as cracks, pin holes, welding laps and porousness either during manufacture or on-site. A three part system. **SFD-501C** is a cleaner. **SFD-502C** is a dye penetrant. **SFD-503C** is a developing fluid that reacts with the dye in **SFD-502C** to show small cracks in the weld. Each part supplied in an ozone friendly 500ml aerosol.

BIG VALUE 500ml Cans!



Flaw Detector Cleaner Spray

SF1-500B
Quick drying, powerful solvent for cleaning surfaces prior to testing. Removes contaminants including oils, greases and grime.

Product Number	Size	Order Code
SF1-500B	500ml	-0240K

Flaw Detector Dye Penetrant

SF2-500B
Highly sensitive red dye, for use when detecting flaws on metal components under normal lighting conditions.

Product Number	Size	Order Code
SF2-500B	500ml	-0260K

Flaw Detector Developer

SF3-500B
White film to highlight any faults which have been detected when using Flaw Detector Penetrant. The product should be removed using Flaw Detector Cleaner Spray once cracks have been found and marked.

Product Number	Size	Order Code
SF3-500B	500ml	-0280K

Leak Detector Spray

SL1-400A
A specially formulated, high performance, white fluid, designed to identify even the smallest gaseous leak. Applies a thin uniform film of surface active agents which accurately identify any leak or bleeding of joints, bubbles in the applied film indicate the location of the leak. Propelled by compressed air - will not give a false reading if mechanical sensing equipment is used. Suitable for use with most common gases including compressed air, acetylene, butane, propane, chlorine, hydrogen and natural gas.



Product Number	Size	Order Code
SL1-400A	400ml	-0340K

Welders Anti-Spatter Spray


SW1-400C
Solvent based coating that is applied to metal before welding. During welding small blobs of molten metal fall either side of the weld. These blobs are called spatter, this coating is applied before welding and prevents the spatter from sticking to the metal. CO₂ gas propelled aerosol. Totally non-flammable. Silicone free and easily removed with solvents prior to galvanising or painting.



Product Number	Size	Order Code
SW1-400C	400gm	-0840K

Maintenance Welders Anti-Spatter Fluid

Reduces the risk of joint puddling and greatly reduces preparation time prior to final painting. Does not affect any subsequent galvanising or painting operations. Evaporates under normal weld temperatures. Dichloromethane and silicone-free. Non-flammable, non-toxic, non-corrosive and biodegradable.

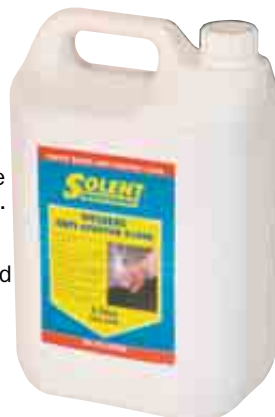

Size	Order Code
5ltr	-9300K
20ltr	-9310K

Silicone Release Spray

SR2-500B - Heavy Duty
Heavy duty silicone lubricant and release agent. Formulated with a high silicone content. The product is suitable for a wide range of uses. SR2-500B is a dry non-oily, non-greasy product. Water clear with no odour.
Size: 500ml aerosol.



Product Number	Size	Order Code
SR2-500B	500ml	-0720K

Silicone Release Spray

SR1-500B - for Plastics & Rubber
Heavy duty silicone lubricant and release agent. Formulated with a high silicone content. The product is suitable for a wide range of uses. SR1-500B is a dry non-oily, non-greasy product. Water clear with no odour.
Size: 500ml aerosol.



Product Number	Size	Order Code
SR1-500B	500ml	-0700K

Mould Release Dry Film PTFE Lubricant

SR3-500B
Mould Release PTFE Dry Film is a micro-thin surface coating that is used to coat the inner surfaces of injection moulding tools/dies, thus enabling easy component release. The coating will not bridge complex mould profiles and will not interfere with precision fits. The applied PTFE film will not transfer to the moulded item. The product can also be used in any location that requires a dry slip surface such as production line slides, tracks or tables.
Size: 500ml aerosol.



Product Number	Size	Order Code
SR3-500B	500ml	-0740K

Lubricants & Chemical Products

SOLENT MAINTENANCE™ Drive Belt Dressing Spray

SB1-500B

Reduces slip on drive belts and helps to stop belt squeal. Can be used on drive belts exposed to weather, ideal for farm machines, alternator drive belts and fan belts. Helps to stop cracking and extends belt life. Can be used on rubber, leather, canvas and most types of synthetic belts.

Size: 500ml aerosol.



Product Number	Size	Order Code
SB1-500B	500ml	SOL-732-0060K

SOLENT MAINTENANCE™ Chain & Drive Spray Lubricant

SM6-500B

Formulated to have a wide range of operating uses. Ideal lubricant for moving chains under extreme load and for chains not fitted with automatic lubrication nor running in oil baths. Formulated with a 'tacky additive' to resist 'throw off' on rapidly moving chains and drives. Ideal for fork trucks/conveyer systems/motorcycle chains. Can be used as a general-purpose lubricant for items subjected to extreme weather conditions. Can be used as a slideway lubricant for machine tools. Strong anti-rust qualities. Does not contain silicone or CFCs.

Size: 500ml aerosol.



Product Number	Size	Order Code
SM6-500B	500ml	SOL-732-0500K

SOLENT MAINTENANCE™ EP Open Gear Spray

SM8-500B - With Molybdenum

Solent EP Open Gear Spray lubricant is a premium extreme pressure lubricant packed in a 500ml aerosol. Based on molybdenum disulphide anti-wear additives. Suitable for lubricating all open gears where a thin film is specified. Suitable for temperatures as low as -40°C to +100°C.



Product Number	Size	Order Code
SM8-500B	500ml	SOL-732-0540K

SHERWOOD QUALITY CUTTING TOOLS Sherwood STD

Spray

400ml foam aerosol penetrates and is able to cling to normally inaccessible areas and moving cutting edges.



Lubricant Type	Size	Weight per 12	Order Code
Spray	400ml	5.1kg	-4000K

SHERWOOD QUALITY CUTTING TOOLS Sherwood STD

STD Tapping & Drilling Lubricant

The Sherwood™ STD Tapping & Drilling foamcut 400ml aerosol spray (non-flammable CO₂ propellant). Foam aerosol penetrates and is able to cling to normally inaccessible areas and moving cutting edges. Can be used on yellow metals without the risk of staining.



NEW

Lubricant Type	Size	Order Code
Foam	400ml	-4200K

SITESAFE Wire Rope Lube Spray

WRS500

This spray lubricant has been formulated to lubricate and protect wire ropes from corrosion. It has good penetrative qualities to lubricate deep into the core of ropes, displacing water and increasing the life of the rope. 'Hi Tack' additives provide excellent adhesion to metal and reduced 'filing off' during use.

Size: 500ml aerosol.



NEW

Container Type	Size	Order Code
Aerosol	500ml	-3450K

Sherwood STD Liquid (Poly Bottle)

Low odour liquid. Coats the cutting edge with a film of EP additives.

Sherwood STD Compound

Low melting point paste maintains a continual lubricant feed to the cutting edge. Hand applied. Suitable for the most severe cutting operations.



Lubricant Type	Size	Order Code
Liquid	500ml	-4020K
Liquid	5ltr	-4060K
Compound	500g	-4040K

Pistol Grip Can Holder & Sprayer

For use with standard diameter 300 - 415ml aerosol containers. Protects hands from cold cans and chemical contact.



For Aerosol Size	Weight each	Order Code
300 - 415ml	55g	-9500K

Chain & Drive Spray

CCA500

This product is a special blend of quality oils, greases and solvents, designed to lubricate and protect all types of cables and slow moving chains. It penetrates quickly into the centre of cables providing excellent protection to the core. It will not sling off, drip or dry out even in adverse conditions. It will also penetrate chain rollers and links enabling smoother working and reduce friction, wear and the possibility of seizure.

Size: 500ml aerosol.



NEW

Container Type	Size	Order Code
Aerosol	500ml	-3500K

GROUP 734 MARKERS - PAINT

KENNEDY Line
QUALITY INDUSTRIAL TOOLING **Markers**

For use on car parks, factory/ warehouse floors, playgrounds, sports fields, tennis courts, leisure centres and road surfaces. For stencils, line or free hand marking. CFC free formula, contains no lead additives. Fully compatible with major brand applicators. Size: 750ml can.



Please note, colours are for guidance only.

Colour	Application	Order Code KEN-734
White	General Marking	-6020K
Yellow	Hazard/ Caution	-6040K
Blue	Mandatory	-6060K
Red	Prohibition/ Danger	-6080K
Green	Safe Condition/ Direction	-6100K
Orange	Hazard/ Caution	-6120K
Black	Deletes Existing Lines	-6140K
Grey	Deletes Existing Lines	-6160K

Line Marking Gun

Manufactured from reinforced nylon. For offering trigger action to line marking spray cans, giving improved comfort during prolonged use.



Description	Order Code KEN-715
Line Marking Gun	-6200K

SOLENT Line Markers

Solent line marker is formulated with a high percentage of colour pigment which gives a bright easy to see finish and resists wear. Durable rapid drying formulation. Suitable for marking out car parks, factory/warehouse floors, playgrounds, sports fields, tennis courts, leisure centres and road surfaces. Can be used with stencils, line or free hand marking. CFC-free formula contains no lead additives. Fully compatible with major brand applicators. Each aerosol is supplied with an extra spray nozzle to ensure good spraying performance during the life of the aerosol. Size: 750ml can.



Colour	Application	Order Code SOL-734
White	General Marking	-6020K
Yellow	Hazard/ Caution	-6040K
Blue	Mandatory	-6060K
Orange	Chemical/ Storage	-6120K

Industrial Paint Markers



Designed for countless metal marking applications. Can be used for marking greasy, rusty, or new metal surfaces. Also suitable for marking glass, plastic, wood, ceramics etc. Ballpoint nozzle cap will only allow ink flow when applied and pressed to the workpiece - ink cannot be spilt from the cap unintentionally. One head can be interchanged from differing inks and bottles. Can be refilled from one litre bulk refills of the specially formulated ink.



Please note, colours are for guidance only.

Colour	Size	Order Code KEN-734
Yellow	46ml	-3020K
White	46ml	-3040K
Blue	46ml	-3060K
Green	46ml	-3080K
Black	46ml	-3100K
Red	46ml	-3120K
Orange	46ml	-3140K

Ink Refill Cases

Colour	Size	Weight each	Order Code KEN-734
Yellow	1ltr	1.4kg	-3210K
White	1ltr	1.4kg	-3230K

Ballpoint Heads - Nickel Plated Steel

Material	Ball Size	Order Code KEN-734
Nickel	2.4mm	-3500K

Permanent Markers

Designed for use on all surfaces. Waterproof, low solvent content. Xylene-free.



Colour	Pack Quantity	Order Code KEN-734
Black	10	-5020K
Blue	10	-5060K
Red	10	-5040K
Green	10	-5070K

PACK OF 10

STUARTS Micrometer Paste

Oil-based paste for indicating high spots on machine bearings, machine tool beds etc. Easily removable with methylated spirit.



Colour	Pack Size	Order Code MIR-734
Blue	28g Tube	-8810B
	38g Tin	-8800A

SOLENT LUBRICANTS **Lithium Grease**



High Load EP No.2: A lithium-based heavy duty grease, with high resistance to water and powerful anti-wear agent.



Pack Type	Size	Order Code
Cartridge	400g	-6100K
Tub	3.00kg	-6105L
Pail	12.5kg	-6110M

SOLENT LUBRICANTS FOR FOOD **Food Safe Lubricating Oil**

This lubricant is completely clear, odourless and food safe, it contains no mineral hydrocarbons and meets with **FDA** and is **NSF H1 registered**.

It is a hydrophobic oil and therefore does not take in water, providing a barrier between water condensation and metal surfaces. This versatile lubricant can be used on sliding and rolling element bearing surfaces, metal, wood and plastics. Non-flammable. Non-Toxic. Anti-corrosive. Safe for use at temperatures from -60° to +260°C.



Pack Size	Order Code
500ml	-5960G
5 litre	-5970H

SOLENT LUBRICANTS FOR FOOD **Synthetic Grease**



The latest generation food-safe grease. Constructed using pure non-toxic synthetic base oils, combined with PTFE and a complex mix of antioxidant and EP packages, making it a versatile tool for use in many applications for many industries. Completely resistant to salt water and high humidity environments. Dielectric and can be used to protect electrical equipment from ingress of water. Lubricates bearings, chains and sliding surfaces including plastic bearings and runners. Has a wide temperature operating range —40°C to 340°C. Grease clean food safe lubricant. Non-melting.



Pack Size	Order Code
100g	-6200A
400ml	-6210B

Food Safe White Grease

Intended use for lubrication of bearings, slides and all delicate mechanisms used in the food manufacturing/processing industry. Maximum operating temperature 150°C with excellent load carrying capacity and water resistance. FDA Compliant. NSF H1 Registered. Non Toxic.



Pack Size	Order Code
400ml	-5900A

SOLENT LUBRICANTS FOR FOOD **Food Safe Penetrating Oil**

Penetrating oil for dismantling, lubricating and cleaning. This odourless oil is tasteless and displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and crevices to release and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces. Can be used as a light lubricant. **FDA Compliant.** **NSF H1 registered.** Food Safe. Synthetic. Translucent. Tasteless water white fluid. Non-Toxic. Anti-corrosive.



Pack Size	Order Code
500ml	-5930D

Food Safe High Tech Grease

Food safe synthetic PTFE grease is a fully synthetic translucent non-melting grease that allows fluid to penetrate into machine parts before setting to a No. 2 rated grease. It protects and lubricates with a non-toxic anti corrosive shield for use on sliding and rolling element bearing surfaces, metal, wood and plastics. Manufactured from non-toxic lubricant ingredients listed by the **FDA** and is **NSF H1 registered**. Totally salt or fresh water resistant to be used inside and out on a range of machinery in temperatures ranging from -40°C to +340°C.



Pack Size	Order Code
500ml	-6220C

Food Safe Silicone Grease

A versatile silicone grease for operation in extremes of high and low temperature. Can also be used on food product applications or where water repellent properties are of prime importance as it offers excellent physical performance and is **NSF H1 registered**. Non-melting, water repellent, odourless, non-toxic, low volatility. High Dielectric. Resistant to oxidation. Thermally stable ozone resistant. Minimal effects on rubbers, plastics and metals. Unaltered by UV light.



Pack Size	Order Code
100g	-6250D
400ml	-6260E
500g	-6270F

Lubricants & Chemical Products