

GROUP 904 BATTERIES & TORCHES

Page **630**

GROUP 906 HAND WIRE BRUSHES

Page **635**

GROUP 907 BRUSHWARE

Pages **636 - 640**

GROUP 910 CHALK

Page **640**

GROUP 918 REFUSE SACKS

Page **641**

GROUP 930 HANDWIPES & CLOTHS

Page **642**

GROUP 935 HOSE CLIPS

Page **643**

GROUP 941 MECHANICAL LIFTING EQUIPMENT

Page **644**

GROUP 942 CHAIN & ROPE FITTINGS

Pages **645 - 646**

GROUP 942 SLINGS

Page **646**

GROUP 945 CASTORS

Pages **647 - 650**

GROUP 949 DOOR & GATE FURNITURE

Pages **651 - 657**

GROUP 950 PADLOCKS

Pages **658 - 661**

GROUP 952 PAPER WIPES & TISSUE

Pages **662 - 663**

GROUP 956 PROTECTIVE SLEEVING

Page **664**

GROUP 957 HEAD PROTECTION

Page **665**

GROUP 958 HEARING PROTECTION

Pages **666 - 667**

GROUP 959 RESPIRATORY PROTECTION

Pages **668 - 669**

GROUP 960 EYE & FACE PROTECTION

Pages **670 - 681**

GROUP 961 HAND PROTECTION

Page **682 - 695**

GROUP 962 SPECIAL HAZARD CLOTHING

Pages **696 - 699**

GROUP 962 WORKWEAR

Pages **700 - 704**

GROUP 962 KNEE & ELBOW PADS

Page **705**

GROUP 964 SAFETY TAPES

Page **712**

GROUP 965 SHIM

Page **712**

GROUP 978 ROPE

Page **714**

GROUP 979 TAPE DISPENSERS

Page **715**

GROUP 981 TAPES

Page **716 - 718**

GROUP 984 TARPULINS

Page **719**

GROUP 985 HANDLING

Page **722**

GROUP 985 HYDRAULIC BENCH PRESS

Page **723**

GROUP 986 INSULATION TAPE

Page **718**

GROUP 990 STEEL WOOL

Page **718**

GROUP 992 TRAFFIC MANAGEMENT

Pages **724 - 725**

GROUP 996 FIRST AID

Pages **726 - 729**

Section 10 Contents

10

Description	Group	Page
Batteries	904	630
Brushware & Cleaning Products	907	636 - 640
Castors	945	647 - 650
Chain & Rope Fittings	942	645 - 646
Chalk	910	640
Cloths & Bins	907	639 - 640
Door & Gate Furniture	949	651 - 657
Eye & Face Protection	960	670 - 681
First Aid	996	726 - 729
Handling	985	722
Hand Protection	961	682 - 695
Hand Wipes & Cloths	930	642
Hand Wire Brushes	906	635
Head Protection	957	665
Hearing Protection	958	666 - 667
High Visibility Clothing	962	696 - 699
Hose Clips	935	643
Hydraulic Bench Presses	985	723
ID Discs	937	643
Insulation Tape	986	718
Knee & Elbow Pads	962	705
Mechanical Lifting Equipment	941	644
Padlocks	950	658 - 661
Paper Wipes & Tissues	952	662 - 663
Protective Sleeving	956	664
Refuse Sacks & Plastic Bags	918	641
Respiratory Protection	959	668 - 669
Rope, Chain & Straps	978	713 - 714
Safety Footwear	963	706 - 711
Safety Tapes	964	712
Shim	965	712
Slings	942	646
Special Hazard Clothing	962	696 - 699
Steel Wool	990	718
Tape Dispensers	979	715
Tapes	981	716 - 718
Tarpaulins	984	719
Torches	904	631 - 634
Traffic Management	999	724 - 725
Workwear	962	700 - 704

Maintenance & Personal Protection

**Section 10
Product Groups
904 - 996**



GROUP 904 BATTERIES

EDISON Alkaline Batteries


A range of alkaline batteries that offer significantly longer life than zinc carbon batteries in high-drain appliances. Suitable for torches, radios, answerphones, toys, calculators, pagers, remote controls, smoke alarms and many other portable electrical appliances.



Cell Type	Battery Size	Volt	Pack Quantity	Order Code EDI-904	
Power Alkaline	AA	1.5V	4	-3020K	N/A
	AAA	1.5V	4	-3040K	N/A
	C	1.5V	2	-3080K	N/A
	D	1.5V	2	-3100K	N/A
	6LR61	9V	1	-3000K	N/A
Battery Set - Contents: 5 Packs AA & 2 Packs AAA				-5000K	N/A

Edison PJ996 6V Lantern Battery

The Edison PJ996 zinc chloride battery is ideal for lanterns, torches and most traffic management lighting, i.e. road construction and maintenance.

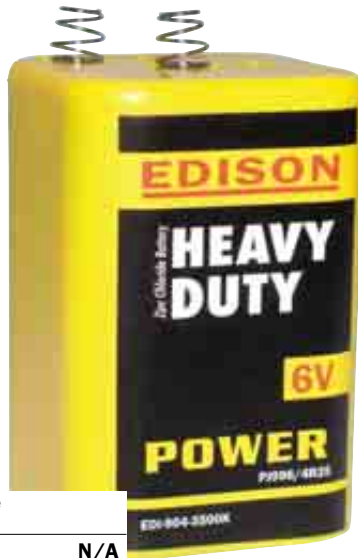

Battery Size	Volt	Pack Quantity	Order Code EDI-904	
PJ996	6V	1	-3500K	N/A

BATTERY SIZE CONVERSIONS

Size	Equivalent To	Volts
AAA	MN2400/LR03/R03U	1.5
AA	MN1500/LR6/HP7/R6U	1.5
C	MN1400/LR14/HP11/R14U	1.5
D	MN1300/LR20/HP2/R20U	1.5
9V	MN1604/6F22(U)/6LR61/PP3	9.0
996	PJ996/4R25(R)	6.0
1289	B1289/3R12	4.5
REMOTE	MN9100/LR1	1.5

Hand Torch & Battery Set

Two corrosion-resistant anodised finish torches. Extra bright, extra long life bulbs. Contents: two professional torches. Overall length: 147mm. Plus four packs of AA batteries.



Number of pieces	Order Code EDI-904	
6	-2920K	N/A

Silver Oxide Button Batteries

Commonly used in watches, calculators, toys and small electrical equipment.



Battery Size	Volt	Pack Quantity	Order Code EDI-904	
SR44	1.5V	1	-4000K	N/A

Lithium Coin Batteries

Commonly used in car security (alarm/key fobs), organiser back-up batteries for PDAs, cameras, calculators, computer equipment, toys, communication equipment, watches, clocks, car radios, video camera data packs.



Battery Size	Volt	Pack Quantity	Order Code EDI-904	
CR2032	3V	1	-3240K	N/A

Maintenance & Personal Protection



EDISON Waterproof Torches

Krypton bulb - 70% brighter than halogen.
 Floats beam upright in water.
 Positive push button control.
 High-intensity beam - adjustable from 'spot' to 'flood'.
 'Anti-roll' design.
 Complete with wrist strap.



Batteries Required	Length (mm)	Weight each	Order Code
2 x C	185	125g	EDI-904
3 x D	280	150g	-2350K
			-2360K

3 Piece Waterproof Lantern and Torch Set - with Batteries

Krypton bulb - 70% brighter than halogen. Waterproof impact resistant high density rubber casing. Floats beam upright in water. Positive push button control.



Lantern

Expertly engineered and superbly balanced to give many years service. 'Anti-roll' design. Integral multi-position support stand.

Waterproof Torches

High-intensity beam - adjustable from 'spot' to 'flood'. 'Anti-roll' design, wrist strap. Complete with batteries for all three units
 2x 'AA', 2x 'C' and 4x D size batteries.



Maintenance & Personal Protection

Type	Weight each	Order Code
3 Piece Set	500g	EDI-904
		-2320K

Bulbs

To suit Edison pocket mini torches and security flashlights.



Description	To Suit Torch	Pack Qty	Order Code
Vacuum Bulb			
12V/0.4A	EDI-904-0050K	1	-0120K
2.4V/0.35A dia. 3mm	EDI-904-0100K	1	-0180K
2.4V/0.4A dia. 5mm	EDI-904-0150K	1	-0240K
	EDI-904-0700K	1	

Description	To Suit Torch	Pack Qty	Order Code
Krypton Bulb			
2.4V/0.35A	EDI-904-2800K	1	-0300K
2.4/0.4	EDI-904-0600K	1	-1600K
2.4/0.75	235/232/	2	-0920K
3.6/0.75	230/236	2	-0940K
3.6/0.75 Push in	EDI-904-0300K	1	-0360K
3.6/0.75 Screw in	EDI-904-0200K	1	-0380K
4.8/0.75		2	-0960K
6.0/0.75	EDI-904-0250K	1	-0600K
6.0/0.75	EDI-904-0350K	1	
9.0/0.75	EDI-904-0400K	1	-0900K

Description	To Suit Torch	Pack Qty	Order Code
Quartz Halogen Bulb			
6.0/55W	EDI-904-2000K	1	-1400K
12/55W	EDI-904-2100K	2	-1240K
Xenon Bulb			
2.4/0.85	EDI-904-282/286	2	-1100K
3.6/0.85	EDI-904-2870K	2	-1120K
4.8/0.85		2	-1140K
Spot Clear Bulb			
12/0.25	EDI-904-2100K	2	-2060K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP 904 TORCHES

EDISON Moulded Grip Xenon Torches




Xenon bulb - 125% brighter than halogen - exceptional bulb life. Produces clear white light - similar to daylight. Moulded high grip sleeve. Push button control. Water and impact resistant. Adjustable beam. With wrist strap.



Model Number	Batteries Required	Length (mm)	Weight each	Order Code
TGX035	3 x D	310	430g	EDI-904-2830K

Titan Grip Xenon Bulb Torches

Xenon bulb - 125% brighter than halogen - exceptional bulb life. Produces clear white light - similar to daylight. Precision machined high-strength aluminium alloy case. Titan style knurled grip. Positive push button control. Corrosion resistant anodised finish. Water and impact resistant. All joints sealed with 'O' rings. Engineered and superbly balanced to give many years service. High-intensity beam - adjustable from 'spot' to 'flood'. Spare bulb stored inside tail cap.

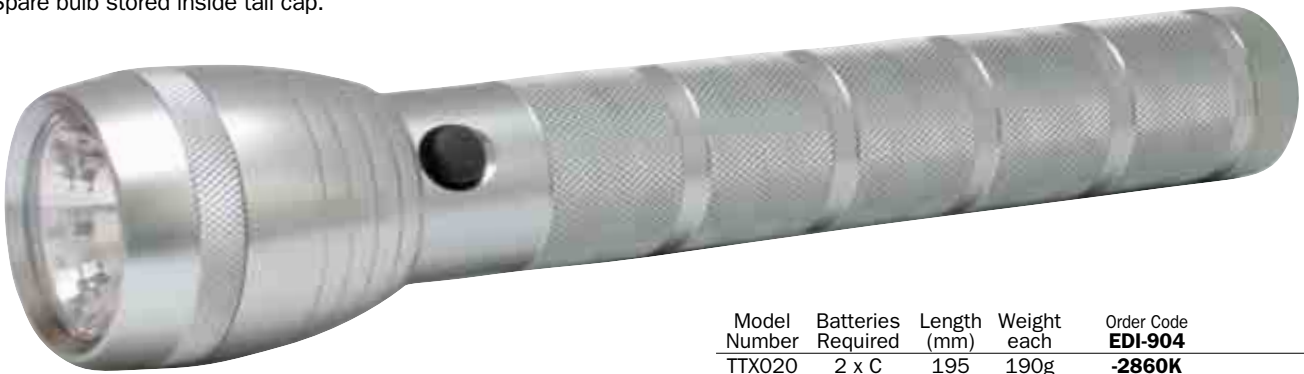

Model Number	Batteries Required	Length (mm)	Weight each	Order Code
TTX020	2 x C	195	190g	EDI-904-2860K
TTX040	3 x D	310	930g	EDI-904-2870K

Professional Aluminium Flashlights

Positive push-button control. Rubber safety caps. Corrosion-resistant anodised finish. Extra bright, extra long life bulbs. Convert to lantern style lamp. Extremely powerful beam converts from spot to flood. Non-slip knurled grip. Aircraft grade aluminium. Waterproof and shockproof with neoprene 'O' rings - superbly balanced and expertly engineered to give many years of service.

Suitable for: engineers, contractors, police and security services, fire and ambulance services.



Batteries Required	Length (mm)	Weight each	Order Code
3 x D	295	475g	EDI-904-0200K
3 x C	280	410g	EDI-904-0300K
5 x C	380	480g	EDI-904-0350K
7 x C	480	440g	EDI-904-0400K

Pocket Torches

Corrosion-resistant anodised finish. Extra bright, extra long life bulbs. Convert to lantern style lamp. Spot to flood adjustable. Non-slip knurled grip. Aircraft grade aluminium. Waterproof and shockproof. Twist action on-off control. Spare bulb inside tail cap. Can be fitted to a key ring. Blister packed.




Batteries Required	Length (mm)	Weight each	Order Code
1 x AAA	87	40g	EDI-904-0050K
2 x AAA	131	45g	EDI-904-0100K
2 x AA	147	70g	EDI-904-0150K

Maintenance & Personal Protection

EDISON **LED**
Torches

Six super bright white LEDs. 100,000 hour LED life. Battery life up to 50 hours (continuous). Precision machined high-strength aluminium alloy case. Twist on/off. Corrosion-resistant anodised finish. Water and impact resistant. Complete with wrist strap. All joints sealed with 'O' rings. Engineered and superbly balanced to give many years service.

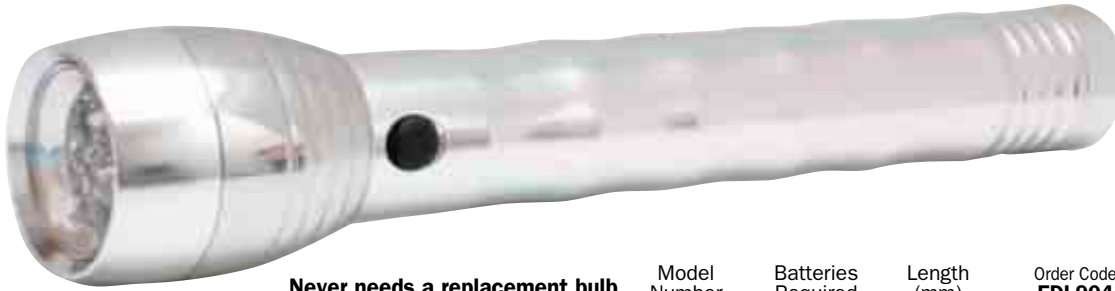


Never needs a replacement bulb

Model Number	Batteries Required	Length (mm)	Order Code
TAL010	2 x AA	150	EDI-904 -2500K
TAL040	3 x D	310	-2520K

New Power LED Torch

No batteries required! Just shake for 30 seconds for up to an hour's worth of bright light. High output LED bulb rated for 100,000 hours use. Holds it's charge, eliminating the need to shake every time you use. The perfect emergency torch for the car, home, garage etc. Weatherproof. Available as individual torch or as a set of two (1x 300mm and 1x 130mm).

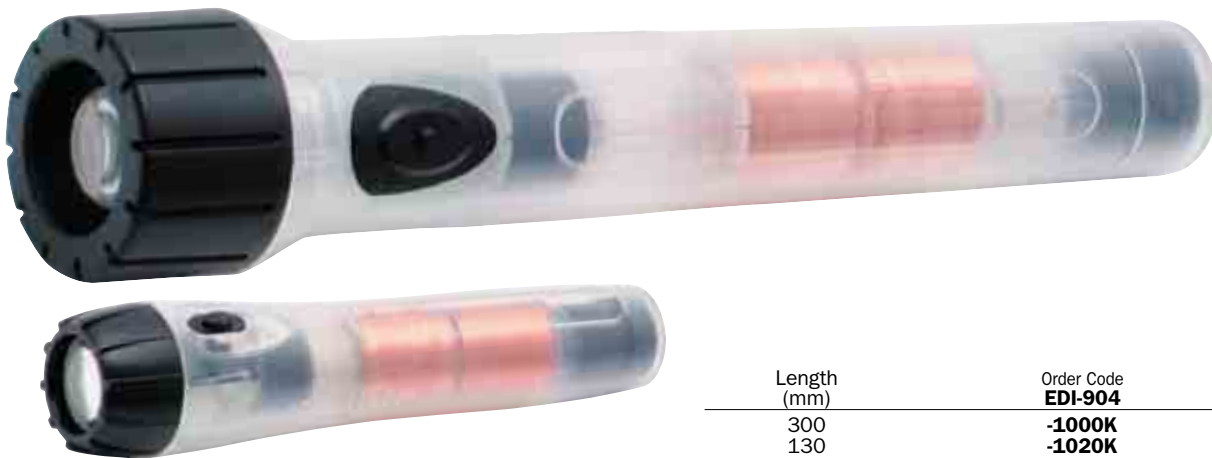


No Batteries Required

Length (mm)	Order Code
	EDI-904
300	-1000K
130	-1020K
130 & 300 Set	-1040K

Moulded Grip Krypton Plus Torches

Krypton bulb - 70% brighter than halogen. Precision machined alloy case. Rubber sleeve for high grip and insulation against cold. Positive twist action on/off. Corrosion-resistant anodised finish. Water and impact resistant. Adjustable from 'spot' to 'flood'. Complete with wrist strap.

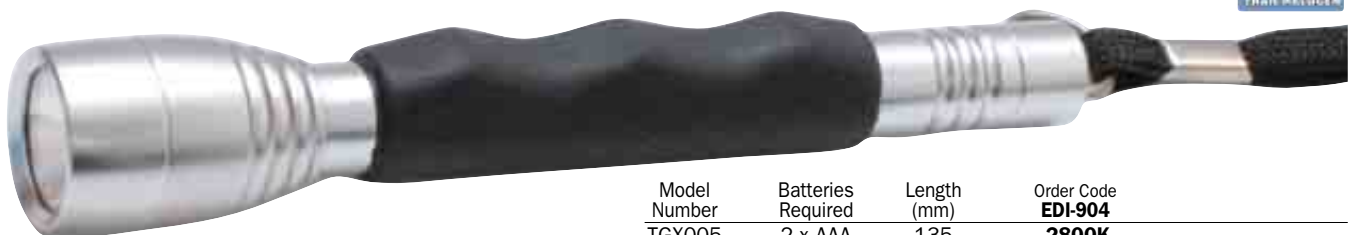

Model Number	Batteries Required	Length (mm)	Order Code
TGX005	2 x AAA	135	EDI-904 -2800K
TGX010	2 x AA	150	-2810K

Flexible Lights

Magnetic Flexible Light

Anodised aluminium handle and head, water resistant and shockproof. Heavy duty magnet - tested up to 2kg. Body can be twisted in any direction. Spare bulb included.



Adjustable Beam Flexible Light

Anodised aluminium handle and head, water resistant and shockproof. Flexible body can be twisted in any direction. Spot to flood adjustable. Spare bulb included. With a key ring clip.

Description	Batteries Required	Length (mm)	Order Code
Magnetic	2 x AA	400	EDI-904 -0600K
Adjustable Beam	2 x AA	400	-0700K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

Maintenance & Personal Protection

GROUP 904 TORCHES

EDISON 1 Million Candle Power Rechargeable Lantern

Super bright quartz halogen spotlight/lantern. Dual position locking handle. 6V 4Ah sealed lead acid battery. Weatherproof construction. Supplied with AC/DC mains charger with battery charging/full indicating LED lights and automotive cigarette lighter adaptor for portable charging. Fitted with automatic thermal cut-out to prevent damage to bulb. Thermal cut-out automatically switches off the power after 20 - 30 minutes continuous use dependent upon operating temperature. Not suitable for continuous use.

1 MILLION CANDLES



RECHARGE ADAPTOR INCLUDED

Dual position locking handle

Candle Power	Weight each	Order Code
1m	2.0kg	-2000K

2.5 Million Candle Power Rechargeable Lantern

Super bright quartz halogen spotlight/lantern. Two carry handles. 6V 4Ah sealed lead acid battery. Weatherproof construction. Supplied with AC/DC mains charger with battery charging/full indicating LED lights and automotive cigarette lighter adaptor for portable charging. Fitted with automatic thermal cut-out to prevent damage to bulb. Thermal cut-out automatically switches off the power after 20 - 30 minutes continuous use dependent upon operating temperature.

2.5 MILLION CANDLES




Easy carrying handle



Lower lantern profile



Amber Flash



Carrying Strap

Candle Power	Weight each	Order Code
2.5m	2.85kg	-2100K

CIGARETTE LIGHTER ADAPTOR INCLUDED

RECHARGE ADAPTOR INCLUDED



Maintenance & Personal Protection

Rechargeable Lamp

ILR330

30 LEDs provide a constant high light output with adjustable brightness and an optional flashing mode. Can also be stood upright. Powered by high capacity lithium-ion polymer batteries which uses induction charging technology to make the battery last up to 6 hours when fully charged. Fitted with a battery low warning. Wall or bench mount charging base with 1.9m power cable*. Housed in a heavy duty rubber and polycarbonate case with a sealed switch. Water oil and dust resistant to IP68 making it durable, robust and reliable. Fitted with a fold-away swivel hanging hook. Ideal for use in automotive workshops, the construction industry and other low light work areas.


*Screws and wall plugs for mounting the charging unit to a wall are not included.

Specification:

Run time: 6 hours.
Charge time: 4 hours.
Size: 280 x 55 x 45mm.
Supplied with: 230V AC charger.

Waterproof - Rated to IP68

LED LIGHT-EMITTING DIODE

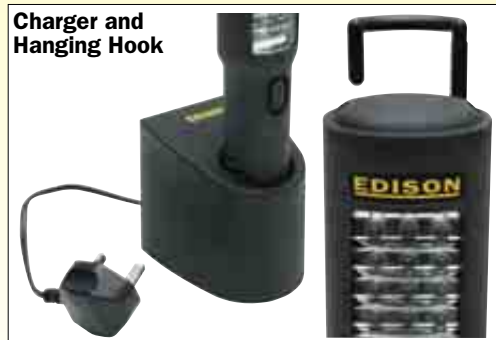


Type	Order Code
Rechargeable Lamp	-1100K



Slimline Brushes

Plain metal handles, with steel wire or nylon bristle filling. Suitable for heavy duty cleaning and decarbonising.

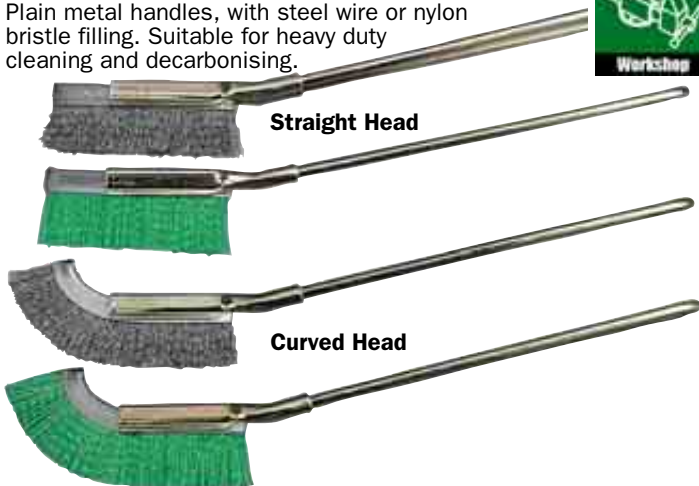

Straight Head

Curved Head

Straight Head

Type	Head Length	Weight per 20	Order Code KEN-906
Steel	50mm	1.1kg	-1800K
Nylon	50mm	1.0kg	-1850K

Curved Head

Type	Head Length	Weight per 20	Order Code KEN-906
Steel	70mm	1.1kg	-1900K
Nylon	70mm	1.0kg	-1950K

Wire Scratch Brushes

Designed for cleaning all rough surfaces on a variety of materials to remove paint, dirt, rust and stubborn deposits. Hardwood stocks.

Cast Steel

For general-purpose work.




* With scraper

No. of Rows	Bristle Type	Weight each	Order Code KEN-906
2	Cast Steel	85g	-6200K
3	Cast Steel	115g	-6300K
4	Cast Steel	130g	-6400K
4*	Cast Steel	155g	-6450K

Stainless Steel

Stainless steel wire scratch brushes are used predominantly in stainless steel welding processes, where the use of an ordinary wire scratch brush would create the risk of contamination of the weld.



No. of Rows	Bristle Type	Weight each	Order Code KEN-906
2	Stainless Steel	140g	-7200K
3	Stainless Steel	210g	-7300K
4	Stainless Steel	220g	-7400K

Brass

These brass wire brushes are used in situations where there could be a potential fire or explosion hazard. Brass wire brushes will not cause a spark.



No. of Rows	Bristle Type	Weight each	Order Code KEN-906
2	Brass	130g	-8200K
3	Brass	220g	-8300K
4	Brass	230g	-8400K

KENNEDY Twisted Wire Tube Brushes
QUALITY INDUSTRIAL TOOLING

Twisted wire handle for hand use. For industrial maintenance, agricultural, workshop, machinery etc. For decarbonising and heavy duty cleaning use of tubes, struts, awkward places etc.



Type	Dia. (mm)	Brush Length	Overall Length	Weight	Order Code KEN-906
Steel	10	100mm	215mm	600g/50	-1030K
	15	105mm	215mm	325g/20	-1050K
	20	100mm	210mm	345g/20	-1060K
	25	100mm	215mm	275g/10	-1100K
	30	80mm	210mm	295g/10	-1120K

7 Piece Set Contents:

Tube brushes: 1x 10, 15, 20, 25 and 30mm diameter. Nylon slimline brushes: 1x curved and 1x straight.

Number of Pieces	Weight each	Order Code KEN-906
7	200g	-9010K

6mm Plain Shank

For use in power tools.



Type	Dia. (mm)	Brush Length	Overall Length	Weight	Order Code KEN-906
Steel	15	60mm	100mm	200g/10	-1250K
	20	60mm	103mm	200g/10	-1260K
	25	60mm	120mm	230g/10	-1300K
	30	60mm	115mm	485g/20	-1320K
	35	60mm	110mm	275g/10	-1330K
Stain-less	15	60mm	100mm	200g/10	-1450K
	20	60mm	100mm	215g/10	-1460K
Steel	25	70mm	120mm	460g/20	-1500K
	30	65mm	120mm	500g/20	-1520K
	35	60mm	120mm	285g/10	-1530K

10 Piece Set

Contents	Weight each	Order Code KEN-906
1 each of above	550g	-9020K

COTSWOLD Wire Scratch Brushes

A range of plastic handled scratch brushes with cast steel bristles.



*With scraper.

No. of Rows	Bristle Type	Order Code COT-906
1	Cast Steel	-6100K
2	Cast Steel	-6200K
3	Cast Steel	-6300K
4	Cast Steel	-6400K
4*	Cast Steel	-6450K
5	Cast Steel	-6500K

Maintenance & Personal Protection

GROUP 907 BRUSHWARE & CLEANING PRODUCTS

COTSWOLD Colour Coded Brushware

Fully colour coded cleaning tools minimise the risk of cross-contamination, therefore there is a need for systems which promote hygienic behaviour. One of the biggest needs is to prevent cross-contamination which means that one food product has contaminated the other. Cleaning tools can spread bacteria from room to room if they are used for widely different purposes. To make it easier to ensure this does not happen, tools which are visually different should be used.

Colour Coded Cleaning Zones

Good cleaning routines are very important to ensure good hygiene. Colour coded cleaning zones can minimise one of the most important reasons for cross-contamination. It is not appropriate to clean table surfaces with the same brush with which you a few minutes before cleaned the floor.

By assigning different colours to different zones, cross contamination of product can be eliminated.

Synthetic Mop Heads


Traditional mop heads with screw fitting socket centre. Suitable for use with traditional style mop buckets. Suitable for cleaning in an autoclave. Synthetic yarn scientifically developed for improved absorbency, higher durability and less shrinkage.



Colour	Order Code
Red	-6720K
Yellow	-6730K
Blue	-6700K

Hand Scrubbing Brush

Stiff bristled brush for removing stubborn stains and cleaning. Figure 8 style body with recessed centre 1/3 for reduced friction. Suitable for floors walls and hard surfaces.



Colour	Order Code
Blue	-6500K

Soft Crimp Poly Handle Brushes

Soft brushes suitable for dry use. Wide oval handle for user comfort. Hanging hole for storage or for clipping to a tool belt for safety when using steps or ladders.



Colour	Order Code
Blue	-6600K

Aluminium Threaded Handles


Lightweight tubular aluminium handle. Suitable for use with synthetic mop heads and stiff poly sweep heads. With moulded finger grip handle. Overall length: 1220mm.



Colour	Order Code
Red	-6370K
Blue	-6350K

Alloy Kentucky Mop Handles

With quick release mop head lever for maximum productivity. With moulded finger grip handle. Overall length: 1250mm.

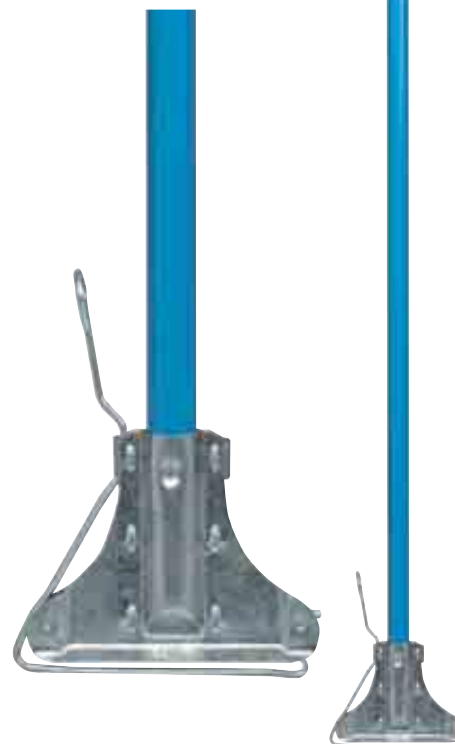

Colour	Order Code
Blue	-6800K

12" Stiff Poly Sweep Broom Head

Stiff bristles suitable for wet or dry use. Medium pile for general-purpose use. Moulded handle socket suitable for use with aluminium threaded handles (supplied separately).



Colour	Order Code
Red	-6070K
Blue	-6050K

12" Soft Poly Broom Head

Soft broom head suitable for dry use. Short pile for sweeping heavily soiled areas. Moulded handle socket. Suitable for use with aluminium threaded handles (supplied separately).



Colour	Order Code
Red	-6120K
Blue	-6100K

Kentucky Mop Bucket

I-beam handle design for maximum strength with reduced weight. Removable drainer with handle compression. Four castors for easy manoeuvrability. Capacity: 24ltr.



Colour	Order Code
Yellow	-7180K

Maintenance & Personal Protection

KENNEDY Broom Heads
QUALITY INDUSTRIAL TOOLING

Top quality broom heads supplied with or without handles. Available with coco or bassine fibres. Coco broom heads are ideal for indoor domestic use, whilst bassine are more suitable for heavier industrial applications.



Description	Hole Dia.	Weight each	Order Code
12" Natural Coco	15/16"	340g	-1200K
12" Bassine	15/16"	320g	-1280K
18" Natural Coco	1 1/8"	650g	-1400K
18" Bassine	1 1/8"	620g	-1480K
24" Natural Coco	1 1/8"	770g	-1500K
24" Bassine	1 1/8"	830g	-1580K
Brush Stabiliser Bar		950g	-1800K

Ribbed Nylon Door Mats


With grippa backing to prevent movement under foot. Hard wearing.



Size	Weight each	Order Code
76 x 46cm	825g	-5140K

Coir Fibre Door Mats

With bound edges.

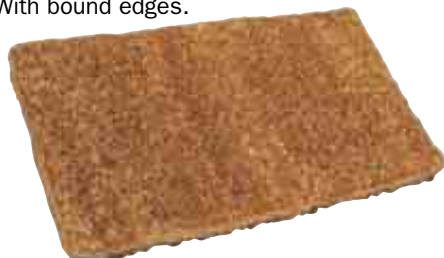

Size	Weight each	Order Code
84 x 51cm	900g	-5040K

Metal Hand Shovel

Wooden handle, 180mm wide pan, painted finish, medium duty.



Width	Order Code
180mm	-4700K

Stale Holder

Will fit all flat back brooms listed above. The stale holder is fixed in place two 10 x 3/4" pozi pan screws (supplied).



Type	Order Code
Stale Holder	-1850K

Snow Shovel

High strength ridged plastic pan. Size: 425 x 300mm with 1400mm long handle.



Dimensions (W x L)	Order Code
425 x 300mm	-3600K

Hooded Metal Dustpan

Riveted construction with loop handle.



Size	Order Code
320mm	-4670K

COTSWOLD Sweeping Mops


High quality acrylic head covers for superb performance on parquet/wood floors, tiles and lino floors. Universally jointed zinc plated head frame, beechwood handle.



Description	Overall Length	Order Code
Complete Mop	460mm (18")	-2700K
	610mm (24")	-2720K

Plastic Dustpan & Brush

265mm brush with firm synthetic bristles and 223mm wide dustpan. Clips together for convenient storage.

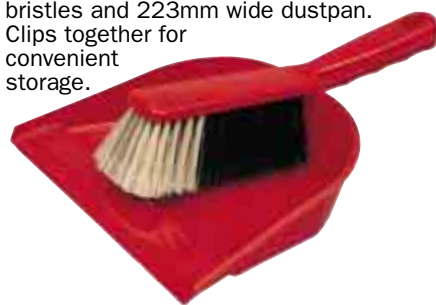

Dimensions (W x L x H)	Order Code
250 x 320 x 235mm	-4600K

Long Handled Plastic Dustpan & Brush Set

Angled brush head and extra long 980mm handles allow floors to be swept without bending. Synthetic bristles. Clips together for storage. Pan has rubber contact lip.



Dimensions (W x L)	Order Code
250 x 320mm	-4650K

Bannister Hand Brushes

With contoured beechwood handles.



Type	Order Code
Natural Coco	-2200K
Bassine	-2250K

Maintenance & Personal Protection

GROUP 907 BRUSHWARE & CLEANING PRODUCTS

Economy

Soft synthetic bristles with plastic body to prevent damage to car bodywork. Fits 12mm (1/2") diameter hose pipes.



Weight each	Order Code
	COT-907
-1100K	

Stainless Steel Squeegees

For rapidly removing water from windows for a smear-free finish. Ribbed rubber hand grip, will not slip when wet. Can be fitted to telescopic extension.



Spring loaded blade retention allows handle to be positioned anywhere along its length. Replaceable rubber blades.

Blade	Order Code
300mm (12")	-3800K
450mm (18")	-3820K
Replacement Squeegee Blade	
450mm (18")	-3840K

Rectangular Bucket

Ideal for use with window washers and squeegees.



Size (W x L x H)	Weight each	Order Code
370 x 170 x 240mm	570g	-4300K

COTSWOLD Folding 'Wet Floor' Sign

Highly visible, secures areas needing to be marked off. Impact resistant. Folds flat for space storage. Ridged pattern on feet minimises contact with floors. Dimensions (L x H x W): 275 x 625 x 25.



Height (mm)	Weight each	Order Code
625	2.5kg	-7600K

KENNEDY Broom & Mop Handles

Replacement wooden handles for mops and brooms.



Length x Diameter	Weight each	Order Code
48" x 15/16"	340g	-1900K
48" x 1 1/8"	500g	-1920K
60" x 15/16"	450g	-1940K
60" x 1 1/8"	660g	-1960K

Pure Yarn Socket Mop Heads

For wet use. Highly absorbent. Galvanised socket.

Size	Weight each	Order Code
No.10	140g	-2800K
No.12	170g	-2820K

KENNEDY Cellulose Sponge

Size: 140 x 100 x 25mm yellow cellulose sponge.



Weight each	Order Code
70g	-4170K

Jumbo Sponge

Size: 200 x 100 x 70mm yellow jumbo sponge.



Weight each	Order Code
35g	-4150K

Galvanised Mop Bucket

Heavy duty with perforated drainer. Width: 240mm. Length: 330mm. Height: 230mm.



Capacity	Weight each	Order Code
13.5ltr	1.70kg	-8180K

Kentucky Mop Heads

Cotton twine with heavy duty stitched centres.



Size	Weight each	Order Code
450g	350g	-2500K
570g	450g	-2510K

Mop Handles

To suit above.

Type	Length (mm)	Weight each	Order Code
Aluminium	1250	480g	-2680K
Beech	1270	600g	-3500K

Rectangular Squeeze Mop Bucket

Impact resistant polypropylene.



Size (W x L x H)	Weight each	Order Code
230 x 310 x 22mm	640g	-4220K

Aluminium Mop Bucket

Zinc plated, with foot operated wringing unit. Diameter: 290mm. Height: 285mm.




Capacity	Weight each	Order Code
17ltr	2.00kg	-4200K

Maintenance & Personal Protection

KENNEDY Cotton Dishcloths
QUALITY INDUSTRIAL TOOLING


Bleached white 2 ply cotton dishcloths with sewn edges. Size: 300 x 360mm. Supplied in packs of 10.

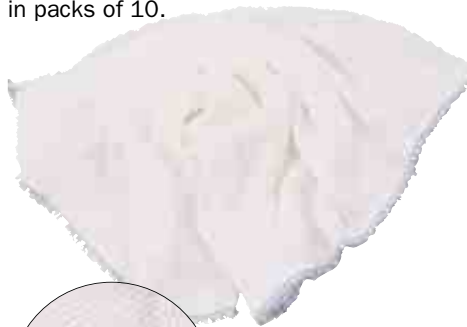

Weight per 10	Order Code
300g	KEN-907
	-4010K

Yellow Duster


Soft traditional yellow duster. 100% natural cotton with sewn edges. Size: 510 x 400mm.

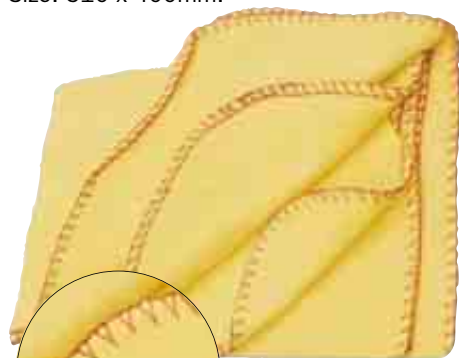

Weight per 10	Order Code
300g	KEN-907
	-4090K

Floorcloths



General-purpose open knit mixed fibre floor cloth. Size: 450mm x 400mm. Supplied in packs of 10.

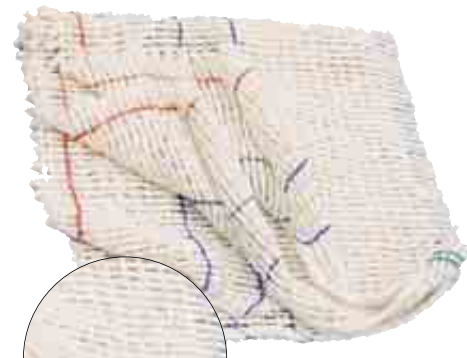

Weight per 10	Order Code
500g	KEN-907
	-4040K

Tea Towel


Traditional plain cotton tea towel for general-purpose use. Size: 510 x 760mm.

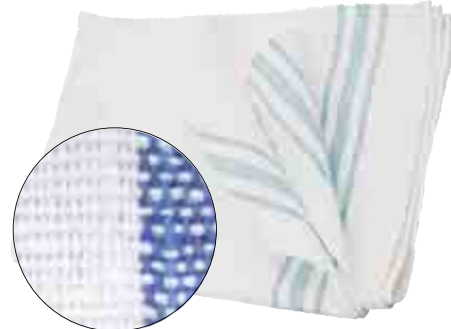

Weight each	Order Code
340g	KEN-907
	-4070K

Stockinette Roll

100% cotton stockinette roll, can be cut to length as required. Good economical format which can be used for a wide variety of cleaning tasks. 300mm wide x 8.5m in length.



Weight each	Order Code
830g	KEN-907
	-4050K

Genuine Chamois Leather


Size: 60 x 30cm.



Weight each	Order Code
60g	KEN-907
	-4130K

Synthetic Chamois Leather

Fully reusable and highly absorbent this perforated synthetic chamois is soft and gentle on any surface and suitable for many tasks ranging from cars, boats, glass, furniture, tiles, kitchens etc. Size: 400 x 400mm.

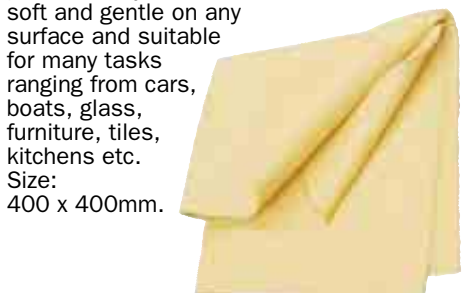

Weight each	Order Code
60g	KEN-907
	-4110K

Nail Brushes

90mm long, with stiff bristles on both sides. For cleaning both hands and nails.



Wooden

Plastic

Bristle Type	Weight each	Order Code
Nylon	35g	-2500K
Wooden	55g	-2550K

Scrubbing Brush

Single tufted (Single heel) pattern. Union mixture.



Length	Weight each	Order Code
8"	180g	KEN-907
		-2400K

Suede Brush

With brass wire bristles. Ideal for cleaning suede, nu-buck and hide.



Length	Weight each	Order Code
165mm	30g	KEN-907
		-2700K

Toilet Brush Set

Plastic handle with polypropylene fill. Standard traditional turks head design. Brush and holder set for easy storage.



Type	Weight each	Order Code
Plastic	160g	KEN-907
		-2650K

Lambswool Duster

Extra reach handle. For cleaning blinds, high corners, bookcases etc.



Overall Length	Weight each	Order Code
1200mm/47"	200g	COT-907
		-4800K

Maintenance & Personal Protection

KENNEDY
QUALITY INDUSTRIAL TOOLING

Industrial Maintenance Brushes

Ideal for a wide variety of tasks around the workshop, home and for use when applying creosote, cleaners and degreasers etc. Wooden handles with pure bristles.



Size	Weight each	Order Code
1/2"	13g	-0210K
1"	23g	-0250K
1 1/2"	39g	-0270K
2"	47g	-0290K
2 1/2"	63g	-0310K
3"	76g	-0330K
4"	100g	-0350K

Sash Brushes

Plastic handle. Ideal for cleaning out sawdust, swarf etc.



Size (mm)	Dia. each	Weight each	Order Code
No.6	12	24g	-3060K
No.8	15	26g	-3080K
No.10	20	29g	-3100K
No.12	22	34g	-3120K
No.16	25	35g	-3160K

Suds Brush


Twisted wire. For brushing down and clearing machine slide tables, engine parts etc.



Length	Weight each	Order Code
240mm	20g	-3250K

Tar Brushes

For use with tar, creosote, whitewash etc. All with 80mm (3 1/8") heads. Short Handle Length: 300mm (12").

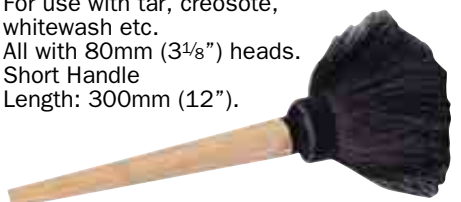

Weight each	Order Code
130g	-1010K

School Chalk

Round Sticks
High grade. 10 x 100mm. Chalkboard grade. Easy to write - easy to erase. Ideal for a vast range of non-permanent marking uses in construction, fabrication, sports and other applications. 100 pieces per box.



Pack Size	Weight each	Order Code
100 Sticks	880g	-0100K

Industrial Maintenance Brush Set

Superb value for money. Ideal for a wide variety of tasks around the workshop, home and for use when applying creosote, cleaners and degreasers etc. Wooden handles with pure bristles.



Contents:

4 off each 12mm (1/2"); 25mm (1") and 50mm (2"); 1 off each 75mm (3") and 100mm (4").

No. of Pieces	Weight each	Order Code
14	200g	-0400K

Tar Bucket

10ltr galvanised 'V' lipped bucket with hooped top for extra strength. With side handle.



Capacity	Weight each	Order Code
10ltr	1.90kg	-4100K

Long Handle - Bell Type
Length: 1270mm (50").



Weight each	Order Code
420g	-1050K

French Chalk

Square Sticks - 10 x 100mm
For general layout marking in a wide variety of applications from marking tailor's seams and weld marking on sheet materials in fabrication industries.
Flat Sticks - 5mm x 12 x 125mm
Flat sticks can be used with separate holder CTL-885-7359D.



Shape	Box Qty	Weight each	Order Code	Price/Box
Square	50	1.30kg	-0200K	
Flat	144	3.74kg	-1000K	

Dustbins

80ltr capacity. Designed for domestic and commercial use. Plastic bins are not suitable for use with hot ashes or large, sharp swarfs.



Type	Diameter (mm)	Order Code
Plastic	450	-9050K
Galvanised	450	-9000K

Builders Buckets

13.5ltr (3 gal.) capacity. Rubatype: Large "V Lip". All Rubber.



Type	Weight each	Order Code
Rubatype	2.10kg	-8130K

15ltr Invincible Yellow Builders Bucket

15ltr (3 gal.) filling scale inside. 5 year guarantee.



Capacity	Order Code
15ltr	-8300K

French Chalk Dusting Powder

Multi-purpose chalk powder. Ideal for dusting down tube repairs prior to refitting tyre. Used by weight lifters. Stops sticking between sheet materials.



Description	Weight each	Order Code
Powder	500g	-0300K

Maintenance & Personal Protection

REFUSE SACKS & PLASTIC BAGS

AVON Black Refuse Sacks

Heavy duty bags bulk packed for industrial use. Available in a choice of four gauge thicknesses. Dimensions: 46 x 74 x 100cm (18" x 29" x 39").



EXTENDED RANGE

Dimensions (W x L x H) cm	Thickness	Pack Qty	Order Code AVN-918
46 x 74 x 100	140 Gauge	200	-0070K
	160 Gauge	200	-0150K
	180 Gauge	200	-0080K
	225 Gauge	200	-0240K
	350 Gauge	100	-0090K

Coloured Refuse Sacks

Heavy gauge refuse sacks. For colour coded disposal systems. Available in a choice of four colours. Dimensions: 46 x 74 x 100cm (18" x 29" x 39").



NEW

Colour	Thickness	Pack Qty	Order Code AVN-918
Red	160 Gauge	200	-0100K
Green	160 Gauge	200	-0110K
Yellow	160 Gauge	200	-0120K
Blue	160 Gauge	200	-0130K

White Bin Liners

White plastic bin liners. For domestic and office use.

'SPLIT PACK' QUANTITIES ARE ALSO AVAILABLE PLEASE ASK FOR DETAILS



NEW

Size (mm)	Litres	Thickness (micron)	Order Code AVN-918	Price/1000
15 x 24 x 30	45	11	-0170K	
15 x 24 x 24	30	11	-0180K	
15 x 24 x 24	30	7	-0190K	

Black Refuse Sacks - On a Roll

Economical extra strong recycled polythene refuse sacks. Suitable for domestic and office use. Dimensions: 46 x 74 x 86cm (18" x 29" x 34").



Dimensions (W x L x H) cm	Thickness	Bags Per Roll	Order Code AVN-918	Price/1
46 x 74 x 86	120 Gauge	20	-0160K	

Wheelie Bin Liners

Heavy gauge refuse sacks. Specifically designed for use with wheelie bins.



NEW

Size (inch)	Thickness	Pack Qty	Order Code AVN-918
30 x 46 x 54"	180 Gauge	100	-0200K
20 x 35 x 47"	350 Gauge	100	-0210K
30 x 45 x 54"	150 Gauge	100	-0220K
30 x 50 x 54"	180 Gauge	100	-0230K

Compactor Sacks

Extra large and heavy gauge for use with bulk disposable of refuse including larger objects.



NEW

Dimensions (W x L x H) cm	Thickness	Pack Qty	Order Code AVN-918
51 x 86 x 120	300 Gauge	100	-0250K

Woven Polypropylene Sacks

A material made by weaving polypropylene tapes in two directions to form a lightweight breathable fabric suitable for grains, seeds, minerals, sand and other products. Woven polypropylene bags offer the best packaging for a large variety of products in industries such as agriculture, chemical, mining, building materials, and construction. Woven polypropylene bags offer economy, better protection, weight savings, and greater strength than other available packaging. Sold in packs of 100.



NEW

Size (mm)	Size	Pack Quantity	Order Code AVN-918
230 x 310	9" x 12"	100	-0020K
310 x 460	12" x 18"	100	-0030K
380 x 500	15" x 20"	100	-0040K
460 x 620	18" x 24"	100	-0050K
620 x 1000	24" x 40"	100	-0060K

GROUP 930 HAND WIPES & CLOTHS

SOLENT Graffiti Wipes
CLEANING & HYGIENE

A soft wet wipe, formulated for the removal of graffiti from all smooth surfaces. Safe to use in public areas. Tub of 150 (28 x 28cm) wipes.



Quantity	Order Code
150	SOL-930 -4800K

Paint & Mastic Wipes

A soft hand and surface wipe, ideal for removing non-cured petroleum based products such as paint, adhesives and mastics. Tub of 150 (28 x 28cm) wipes.



Quantity	Order Code
150	SOL-930 -5000K

Multi Wipes

A soft hand and surface wipe, ideal for removing grease, grime, oil, tar, ink and general dirt. Tub of 150 (28 x 28cm) wipes.



Quantity	Order Code
150	SOL-930 -4600K

SOLENT FOR FOOD **Food Safe Probe Wipes**

These single use wipes are for the disinfectant cleaning of food probes to prevent cross contamination. Tub of 175 (13 x 13cm) wipes.



Quantity	Order Code
175	SOL-930 -5500K
70	-5550K

Food Safe Hand Wipes

These non-toxic single use wipes are excellent for killing lethal bacteria and prevent cross-contamination. Tub of 200 (20 x 30cm) wipes.



Quantity	Order Code
200	SOL-930 -4400K

SOLENT Sanitise Wipes **NEW**

A single use wipe for sanitising all types of surfaces. Impregnated with a fast acting disinfectant that has a high kill rate, effective against most bacteria including C.Diff.



Quantity	Order Code
200	SOL-930 -5200K
1000	-5250K

SOLENT Workshop Hand Wipes
CLEANING & HYGIENE

Standard Duty
Soft white wipes. Removes oil, grease, ink and general dirt. 'Waterless' - no need to rinse hands after cleaning. Ideal for mobile repair and maintenance vans and use around the workshop.



Quantity	Order Code
150	SOL-930 -3900K

Heavy Duty Hand Wipes

Heavy duty wipes impregnated with mild abrasive fibres to remove oil, grease, general grime plus difficult to remove contaminants such as paints, sealants, most inks and ground-in dirt. A citrus-based natural cleaning agent leaving hands feeling invigorated and smelling of fresh orange.



Product Type	Sheets	Order Code
Handy Pack	50	SOL-930 -3800K
Tub	100	-4000K

Engineers Wipes - High Performance Work Wipes

For removing the thickest of grease and grime. Designed for use by mechanics, engineers, printers, electronics industry etc. Very low lint - solvent resistant - high wet strength - silicone-free. Smaller sheet size for reduced cost per wipe. Fabric type: 48% polyester, 52% wood pulp, spun lace with light aperture. Total cloth area = 24.3m².



Quantity	Order Code
250	SOL-930 -3000K

Maintenance & Personal Protection

MATLOCK *Hose Clips*
CHANDLERY

Non-slip worm drive.
Precision manufactured from the finest British steels to **BS 5315**.

Passivated Zinc Finish:
To give double protection.
For automotive, gas plumbing, agricultural and marine applications.



PACK OF 100

PASSIVATED ZINC FINISH

Size	Capacity (mm)	Weight per 10	Order Code MTL-935
000	9-13	0.11kg	-5050K
M00	13-16	0.12kg	-5070K
00	13-19	0.13kg	-5090K
0	16-22	0.20kg	-5110K
0X	19-25	0.22kg	-5130K
1A	22-29	0.23kg	-5150K
1	25-35	0.25kg	-5160K
1X	28-41	0.26kg	-5170K
2A	31-48	0.36kg	-5190K
2	38-54	0.38kg	-5210K
2X	44-60	0.40kg	-5230K
3	50-70	0.42kg	-5250K
3X	60-80	0.46kg	-5270K
4	70-90	0.48kg	-5290K
4X	83-102	0.52kg	-5310K
5	95-115	0.58kg	-5330K
6	104-127	0.60kg	-5350K
6X	127-146	0.66kg	-5370K

Stainless Steel:
304 quality stainless steel.
Will not rust.



PACK OF 100

STAINLESS STEEL

Size	Capacity (mm)	Weight per 10	Order Code MTL-936
000	9-13	110g	-5050K
M00	13-16	120g	-5070K
00	13-19	120g	-5090K
0	16-22	130g	-5110K
0X	19-25	140g	-5130K
1A	22-29	140g	-5150K
1	25-35	160g	-5160K
1X	28-41	180g	-5170K
2A	31-48	200g	-5190K
2	38-54	210g	-5210K
2X	44-60	220g	-5230K

Zinc Plated Hose Clip Sets



PASSIVATED ZINC FINISH

Size	Dia. (mm)		Contents	
	min	max	50	100
000	9	13	4	8
M00	13	16	4	8
00	13	19	6	12
0	16	22	4	8
0X	19	25	3	6
1A	22	29	3	6
1	25	35	5	10
1X	28	41	3	6
2A	31	48	2	4
2	38	54	3	6
2X	44	60	2	4
3	50	70	2	4
3X	60	80	1	2
4	70	90	2	4
4X	83	102	1	2
5	95	115	1	2
6	104	127	1	2
6X	127	146	1	2
7	146	159	1	2
8	149	178	1	2

Number of Pieces	Weight each	Order Code MTL-935
50	1.50kg	-5950K
100	3.00kg	-5990K

Stainless Steel Hose Clip Set



STAINLESS STEEL

Size	Dia. (mm)		Contents
	min	max	50
000	9	13	4
M00	13	16	4
00	13	19	8
0	16	22	6
0X	19	25	5
1A	22	29	4
1	25	35	5
1X	28	41	4
2A	31	48	3
2	38	54	4
2X	44	60	3

Number of Pieces	Weight each	Order Code MTL-936
50	700g	-5950K

HOSE CLIPS/ID DISCS

0 Clips, '2 Ear' Style (Welding Hose Clips)



Manufactured from mild zinc plated/clear passivated stainless steel. Medium pressure clamp, widely used for maintenance and OEM applications. Rubber hose, plastic tubing, coaxial and electrical cable are easily clamped. Suitable for use on air, fluid, gas and steam lines also low pressure hydraulics applications. One piece design offers a positive, tamper proof seal without damage to the hose, assure adequate closure and compensate for tolerance variations in hose sizes.



Gas Hoses Should Only Be Assembled By Professionally Qualified Fitters

Product Number	Capacity (mm)	Weight each	Order Code MTL-935
1330	7-9		-7060K
1331	8-11		-7070K
1332	11-13		-7090K
1333	13-15		-7100K
1334	15-18		-7120K
1335	17-20		-7140K
1336	20-23		-7160K

KENNEDY 0 Clip Pincer
QUALITY INDUSTRIAL TOOLING



Specially designed pliers for closing O-Clips and similar fasteners.



Length (mm)	Weight each	Order Code KEN-935
160	125g	-2010K

Hose Clip-Driver


Chrome finish driver with cushion grip T-handle. 7mm hexagon drive.



Length (mm)	Weight each	Order Code KEN-936
160	125g	-2010K

Hose Clip Flex-Driver

Braided steel wire driver. Bends through 90° to reach otherwise inaccessible clips. High impact 'Hi Grip' handle. Drive shaft has 1/4" hex drive fitted with 7mm (single hex) removable adaptor. Also features swivel collar at drive end.



Length (mm)	Weight each	Order Code KEN-936
280	160g	-2000K

Identity Discs

EXTENDED RANGE

Suitable for all identification uses component/batch/labelling, store/user tracking, key identification etc. 30mm outside diameter.



Type	Material	Weight per 100	Order Code KEN-937
Plain (Single)	Aluminium	0.5kg	-1030K
	Brass	2.5kg	-2030K
Numbered 1 - 100 (Pack of 100)	Aluminium	0.5kg	-1130K
	Brass	2.5kg	-2130K

Maintenance & Personal Protection

GROUP 941 MECHANICAL LIFTING EQUIPMENT

MATLOCK Chain Hoist



Each hoist is made with high grade materials including alloy steel gears and hooks. The unique, specialised outer design allows extra strength, durability and ensures protection of the gears from impact and dust. All load and hand chains are calibrated and supplied in an electro galvanised finish. The load chain is hardened grade 80 alloy steel. All top and bottom hooks are fitted with cast steel, heavy duty catches. Blocks are manufactured to **B53243**. Chain manufactured to **ISO 1834**.

The chain block is not only strong and durable but is safe and light, suitable for all capacity rated applications.



Capacity (Ton)	0.5	1	2	3	5
Standard Lift (M)	2.5	2.5	2.5	3	3
Running Test Load (Ton)	0.75	1.5	3	4.5	6.25
No. Columns of Load Chains	1	1	2	2	2
Load Chain Diameter (mm)	6	6	6	8	10

Capacity (TON)	Order Code
0.5	-4010K
1.0	-4020K
2.0	-4030K
3.0	-4040K
5.0	-4050K

Hook on Plate



End fitment for mounting on to fence posts or walls. Galvanised finish.



Hook x Plate (mm)	Order Code
64 x 50 (2½" x 2")	-7260K

Ring on Plate

For tethering animals, mooring small boats, and securing equipment. Galvanised finish.



Ring x Plate (mm)	Order Code
50 x 50 (2" x 2")	-7200K

S Hooks

General-purpose hook ideal for hanging baskets etc. Galvanised finish.



Length (mm)	Dia. of Material	Order Code
25 (1")	3.0mm	-7590K
38 (1½")	4.5mm	-7600K
51 (2")	5.5mm	-7610K
63 (2½")	6.3mm	-7620K
76 (3")	8.0mm	-7630K

Quick Repair Link

A permanent or temporary connection for joining lengths of chain or rope.



Link Dia. (mm)	Finish	Order Code
4 (¼")	Zinc Plated	-7170K
6 (¼")	Zinc Plated	-7180K
8 (½")	Zinc Plated	-7190K


Pulleys

Ideal for flagpoles, washing lines, and rolling back awning canopies. With cast wheels for ropes up to 8mm dia. Line pulleys are supplied fitted with S type hooks. Galvanised pulleys have cast wheels for rope up to 8mm dia. Black (epoxy) pulleys have nylon wheels for rope up to 9.5mm dia. All types below are with single wheel.

Awning Pulley



Line Pulley

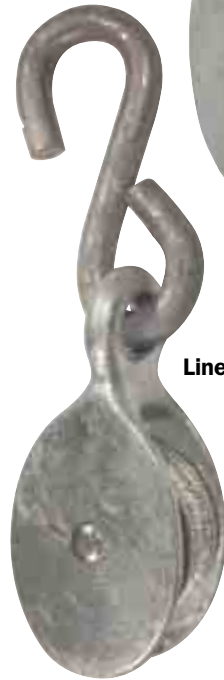

Upright Pulley



Sash Pulley



Pulley Type	Sheath Dia. (mm)	Finish	Order Code
Awning	38 (1½")	Galvanised	-7240K
Line	38 (1½")	Galvanised	-7250K
Upright	38 (1½")	Black	-7690K
Sash	44 (1¾")	Zinc Plated	-7710K

Maintenance & Personal Protection



MATLOCK CHANDLERY Wire Rope Grips

To grip the return ends of wire rope when in a loop. Galvanised finish.



Wire Rope Dia. (mm)	Order Code
3 (1/8")	-7050K
5 (3/16")	-7060K
6 (1/4")	-7070K
8 (5/16")	-7080K
10 (3/8")	-7390K
13 (1/2")	-7380K

Dee Shackles

A coupling link for chain and rope with a 'D' shape to prevent excess movement. Material and pin diameters are equal except where stated. Rated loads are for guidance only - 'tested' dee shackles are available to order. Galvanised finish.



Material x Pin Dia. (mm)	Rated Load	Order Code
5 (3/16")	75kg	-7010K
6 (1/4")	125kg	-7020K
8 (5/16")	150kg	-7030K
11 (7/16")	350kg	-7280K
13 (1/2")	500kg	-7290K

Bow Shackles

A coupling link with a bow shape to allow extra clearance for more than one length of chain or rope. Material and pin diameters are equal except where stated. Rated loads are for guidance only. 'Tested' bow shackles are available to order. Galvanised finish.



Material x Pin Dia. (mm)	Rated Load	Order Code
6 (1/4")	125kg	-7300K
10 (3/8")	250kg	-7310K
13 (1/2")	500kg	-7320K

Carbine Hooks


Quick release hook for connecting to chain or rope. Electro galvanised.



Length (mm)	Order Code
51 (2")	-7490K
60 (2 3/8")	-7500K
70 (2 3/4")	-7510K
80 (3 1/2")	-7520K
90 (3 9/16")	-7530K
101 (4")	-7540K

Swivel Harness Snap Hooks


A general-purpose hook ideal for keys, leashes and holdalls. Nickel plated finish.

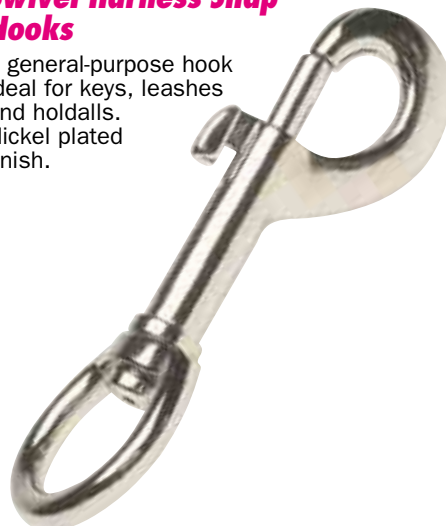

Length x Eye (mm)	Order Code
76 x 20 (3" x 3/4")	-7480K

Swivel Spring Hooks


Connectors for ropes and chains, with swivel to allow revolving and prevent knotting and twisting. Zinc plated.

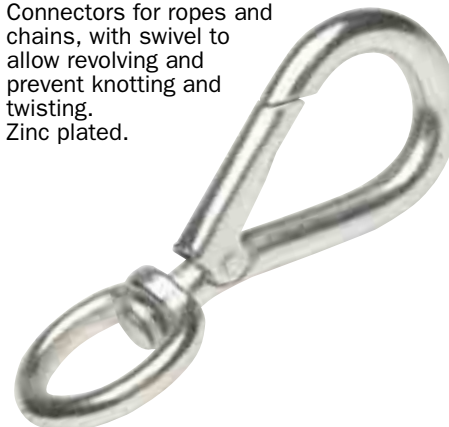

Length (mm)	Order Code
51 (2")	-7450K
63 (2 1/2")	-7120K
76 (3")	-7130K
89 (3 1/2")	-7140K
127 (5")	-7470K

Spring Hook

A permanent end connector for chain and rope. Zinc plated.

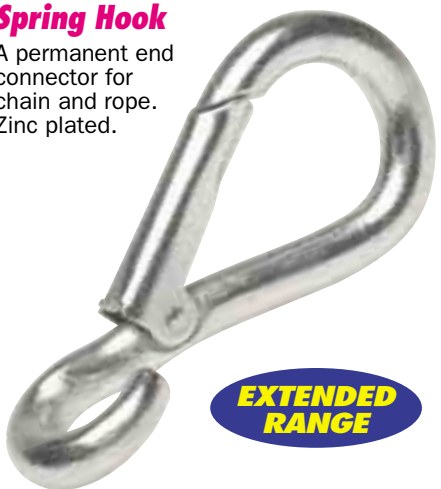

EXTENDED RANGE

Length (mm)	Order Code
51 (2")	-7100K
63 (2 1/2")	-7110K
76 (3")	-7090K
89 (3 1/2")	-7410K
101 (4")	-7420K

Swivel Spring Billet Hooks

Animal leash clips for chains, with swivel to prevent knotting and twisting.



Length (mm)	Finish	Order Code
57 (2 1/4")	Nickel Plated	-7440K

Commercial Thimble

A metal loop that forms a rope eyelet to prevent wear and tear. Galvanised finish.



Length x Rope Dia. (mm)	Order Code
32 x 5 (1 1/4" x 3/16")	-7360K
38 x 6 (1 1/2" x 1/4")	-7370K

Maintenance & Personal Protection

GROUP 942 CHAIN & ROPE FITTINGS/SLINGS

MATLOCK Webbing Slings
CHANDLERY



High strength to weight ratio, light to handle and easy to use. Shock absorbing construction and wide load bearing area produce a secure grip and eliminate damage to the load. All types are made from oil and acid resistant polyester, treated with a wear resistant impregnation. All sizes are colour coded to indicate 'SWL' (safe working load), rating and marked with traceability code. These ratings are for a straight line pull only. Other variations of pull are shown below along with the relevant 'SWL'.

All slings come complete with test certificate.

Supplied with Certificate of Conformity

Safe Working Loads

Straight Line	Choker	Basket	Basket 90°*	Basket 120°*
1,000kg	800kg	2,000kg	1,400kg	1,000kg
2,000kg	1,600kg	4,000kg	2,800kg	2,000kg
3,000kg	2,400kg	6,000kg	4,200kg	3,000kg
4,000kg	3,200kg	8,000kg	5,600kg	4,000kg
6,000kg	4,800kg	12,000kg	8,400kg	6,000kg

*Angle between sling legs.

Flat Slings

With flat metal reinforced eye at each end. Made to **BS 3481 : Part 2**.

Working Length (M)	Width (mm)	'SWL' (kg)	Order Code MTL-942
Simplex Type - Single Thickness			
2	60	1,000	-5010K
	120	2,000	-5020K
	180	3,000	-5030K
3	60	1,000	-5110K
	120	2,000	-5120K
	180	3,000	-5130K
4	60	1,000	-5210K
	120	2,000	-5220K
	180	3,000	-5230K
Duplex Type - Double Thickness			
2	30	1,000	-5510K
	60	2,000	-5520K
	90	3,000	-5530K
	120	4,000	-5540K
	150	5,000	-5550K
3	30	1,000	-5610K
	60	2,000	-5620K
	90	3,000	-5630K
	120	4,000	-5640K
	150	5,000	-5650K
4	30	1,000	-5710K
	60	2,000	-5720K
	90	3,000	-5730K
	120	4,000	-5740K
	150	5,000	-5750K
6	30	1,000	-5810K
	60	2,000	-5820K
	90	3,000	-5830K
	120	4,000	-5840K
	150	5,000	-5850K

Flat Slings



Endless Round Slings

Endless Round Slings

Made to **BS 6668 : Part 2**.

Working Length (M)	Width (mm)	'SWL' (kg)	Order Code MTL-942
0.5	40	1,000	-1960K
	50	2,000	-1970K
	60	3,000	-1980K
	80	5,000	-2000K
1	40	1,000	-2010K
	50	2,000	-2020K
	60	3,000	-2030K
	80	5,000	-2050K
1.5	40	1,000	-2060K
	50	2,000	-2070K
	60	3,000	-2080K
	80	5,000	-2100K
2.0	40	1,000	-2110K
	50	2,000	-2120K
	60	3,000	-2130K
	80	5,000	-2150K
2.5	40	1,000	-2160K
	50	2,000	-2170K
	60	3,000	-2180K
	80	5,000	-2200K
3.0	40	1,000	-2210K
	50	2,000	-2220K
	60	3,000	-2230K
	80	5,000	-2250K



Maintenance & Personal Protection

ATLAS WORKHOLDERS **Nylon Wheel with Plain Bore**

Suitable for use on compact floors (cement, tiles, etc.)
Particularly recommended for the food processing industry.
Not recommended for use where mineral or organic acids are present. Operating temperature range -10°C to +60°C.

Swivel Type with Bolt Hole

With brake



Without brake


Wheel Diameter	Bolt Hole
80 to 150mm	M12

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code ATL-945
Zinc Finish				
80mm	108	130kg	No	-3850K
			Yes	-3890K
100mm	130	150kg	No	-3950K
			Yes	-3990K
125mm	157	200kg	No	-4050K
			Yes	-4090K

Fixed Type with Top Plate



Without brake

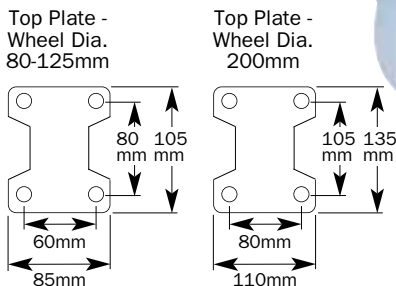


Swivel Type with Top Plate



With brake

Without brake

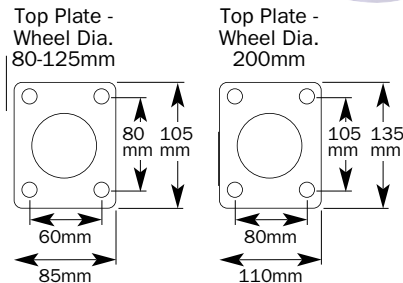

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code ATL-945
Zinc Finish				
80mm	106	130kg	No	-3830K
			Yes	-3870K
100mm	128	150kg	No	-3930K
			Yes	-3970K
125mm	155	170kg	No	-4030K
			Yes	-4070K
200mm	235	300kg	No	-4230K
			Yes	-4270K

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code ATL-945
Zinc Finish				
80mm	106	130kg	No	-3810K
100mm	128	150kg	No	-3910K
125mm	155	200kg	No	-4010K
200mm	235	300kg	No	-4210K

Wheel Only

Wheel Diameter	Width	Hub Diameter	Bore Diameter	Max. Load	Order Code ATL-945
80mm	33	40.0	12.0	130kg	-4400K

Maintenance & Personal Protection

GROUP 945 CASTORS

ATLAS WORKHOLDERS Polyurethane Tyre, Nylon Centre Wheel with Plain Bore

Suitable for use on most surfaces. Suitable for humid environments where medium harsh chemicals may be present. Quiet running with 'cushioned' tyre. Not recommended for use where mineral or organic acids are present.

Swivel Type with Bolt Hole

With brake



Without brake




Wheel Diameter	Bolt Hole
80 to 125mm	M12

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code
Zinc Finish				
80mm	108	100kg	No	-4540K
			Yes	-4580K
100mm	130	130kg	No	-4640K
			Yes	-4680K
125mm	157	200kg	No	-4740K
			Yes	-4780K

Swivel Type with Top Plate


With brake

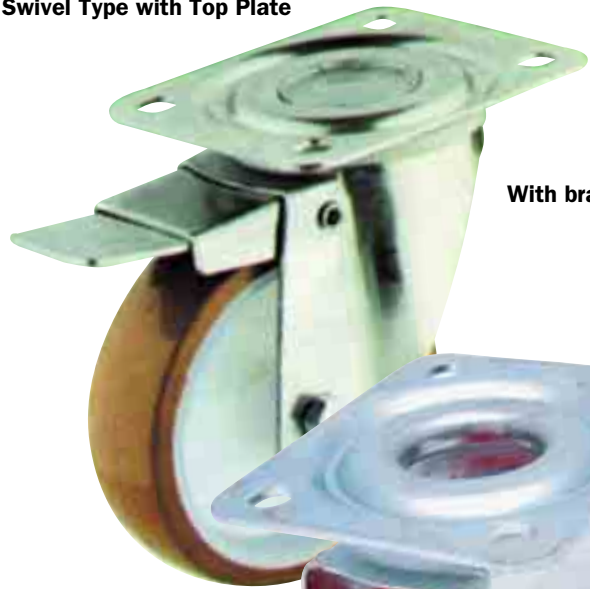


Without brake



Top Plate - Wheel Dia. 80-125mm




Top Plate - Wheel Dia. 200mm



Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code
Zinc Finish				
80mm	106	100kg	No	-4520K
			Yes	-4560K
100mm	128	130kg	No	-4620K
			Yes	-4660K
125mm	155	200kg	No	-4720K
			Yes	-4760K
150mm	181	200kg	Yes	-
			No	-4920K
200mm	235	300kg	Yes	-4960K


Fixed Type with Top Plate

Without brake

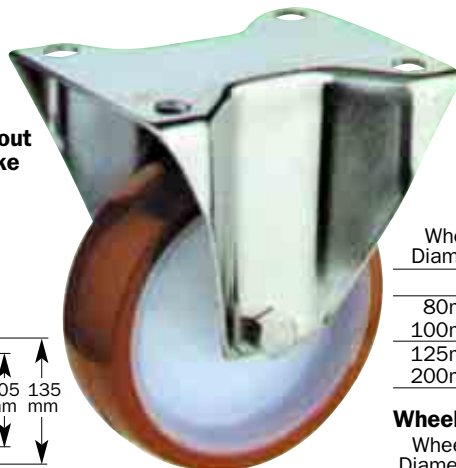


EXTENDED RANGE

Top Plate - Wheel Dia. 80-125mm



Top Plate - Wheel Dia. 200mm



Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code
Zinc Finish				
80mm	106	100kg	No	-4500K
100mm	128	130kg	No	-4600K
125mm	155	200kg	No	-4700K
200mm	235	300kg	No	-4900K

Wheel Only

Wheel Diameter	Width	Hub Diameter	Bore Diameter	Max. Load	Order Code
100mm	30	40.0	12.0	130kg	-5020K
125mm	35	49.0	15.0	200kg	-5030K
200mm	50	58.0	20.0	380kg	-5050K

Maintenance & Personal Protection



Grey Rubber Tyre, Plastic Centre Wheel with Plain Bore

Suitable for use on hard floors (cement, tiles, etc). Non-marking rubber tyre. Quiet running with 'cushioned' tyre Suitable for humid environments where medium harsh chemicals may be present. Not recommended for use with organic solvents, chlorinated substances, hydrocarbons or mineral oils. Operating temperature range -20°C to +60°C.

Swivel Type with Bolt Hole

With brake




Without brake


Wheel Diameter	Bolt Hole				
80 to 125mm	M12				
Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code	ATL-945
Zinc Finish					
80mm	108	50kg	No	-2030K	
100mm	130	70kg	No	-2140K	
100mm	130	70kg	Yes	-2170K	
125mm	157	120kg	No	-2220K	
125mm	157	120kg	Yes	-2250K	

Swivel Type with Top Plate

Top Plate - Wheel Dia. 80-125mm



With brake

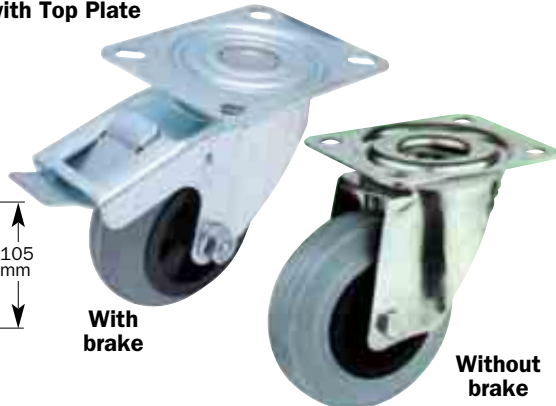


Without brake

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code	ATL-945
Zinc Finish					
80mm	106	50kg	No	-2020K	
			Yes	-2050K	
100mm	128	70kg	No	-2120K	
			Yes	-2160K	
125mm	155	120kg	No	-2210K	
			Yes	-2240K	

Fixed Type with Top Plate

Top Plate - Wheel Dia. 80-125mm



EXTENDED RANGE



Without brake

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code	ATL-945
Zinc Finish					
80mm	106	50kg	No	-2010K	
100mm	128	70kg	No	-2100K	
125mm	155	120kg	No	-2200K	

Wheel Only

Wheel Diameter	Width	Hub Diameter	Bore Diameter	Max. Load	Order Code	ATL-945
80mm	25	45.0	12.0	50kg	-2410K	
100mm	24	45.0	12.0	70kg	-2420K	
125mm	28	45.0	12.0	120kg	-2430K	

Black Rubber Tyre Plastic Centre

Suitable for use on most surfaces. Suitable for humid environments where medium harsh chemicals may be present. Quiet running with 'cushioned' tyre. Not recommended for use where mineral or organic acids are present. Operating temperature range -20°C to +60°C.

Swivel Type with Bolt Hole

EXTENDED RANGE

Without brake




Wheel Diameter	Bolt Hole				
80 to 125mm	M12				
Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code	ATL-945
Zinc Finish					
80mm	108	50kg	No	-5130K	
100mm	130	70kg	No	-5230K	
125mm	157	120kg	No	-5330K	


Swivel Type with Top Plate

Without brake

Top Plate - Wheel Dia. 80-125mm



Top Plate - Wheel Dia. 200mm




With brake

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code	ATL-945
Zinc Finish					
80mm	106	50kg	Yes	-5120K	
			No	-5110K	
100mm	128	70kg	Yes	-5220K	
			No	-5210K	
125mm	155	120kg	Yes	-5320K	
			No	-5310K	
200mm	235	200kg	Yes	-5520K	
			No	-5510K	



Fixed Type with Top Plate

EXTENDED RANGE

Top Plate - Wheel Dia. 80-125mm



Top Plate - Wheel Dia. 200mm

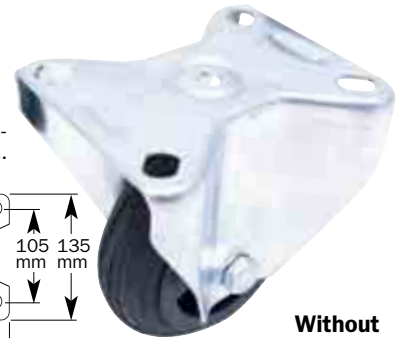

Without brake

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code	ATL-945
Zinc Finish					
80mm	106	50kg	No	-5100K	
100mm	128	70kg	No	-5200K	
125mm	155	120kg	No	-5300K	
200mm	235	200kg	No	-5500K	

Wheel Only

Wheel Diameter	Width	Hub Diameter	Bore Diameter	Max. Load	Order Code	ATL-945
80mm	30	39.0	12.0	50kg	-5610K	
100mm	30	39.0	12.0	70kg	-5620K	
125mm	38	49.0	15.0	120kg	-5630K	
200mm	50	48.0	20.0	200kg	-5650K	

Maintenance & Personal Protection

GROUP 945 CASTORS

ATLAS WORKHOLDERS Black Rubber Tyre Steel Centre Wheel with Roller Bearing

For smooth running with heavier loads. Suitable for use on most surfaces. Suitable for humid environments where medium harsh chemicals may be present. Quiet running with 'cushioned' tyre. Not recommended for use where mineral or organic acids are present. Operating temperature range -20°C to +60°C.


Swivel Type with Bolt Hole

Wheel Diameter	Bolt Hole
80 to 160mm	M12
200mm	M16




Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code ATL-945
Zinc Finish				
80mm	108	70kg	Yes	-2550K
			No	-2530K
100mm	130	90kg	Yes	-2640K
			No	-2620K

Swivel Type with Top Plate

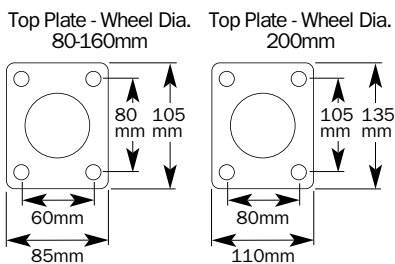

Fixed Type with Top Plate

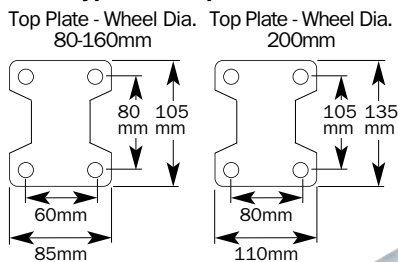

EXTENDED RANGE

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code ATL-945
Zinc Finish				
80mm	106	70kg	No	-2510K
100mm	128	90kg	No	-2600K
125mm	155	130kg	No	-2700K
160mm	195	180kg	No	-2900K
200mm	235	250kg	No	-3000K

Wheel Diameter	Width	Hub Diameter	Bore Diameter	Max. Load	Order Code ATL-945
80mm	25	40.0	12.0	70kg	-3210K
100mm	25	40.0	12.0	90kg	-3220K
125mm	38	50.0	15.0	130kg	-3230K
160mm	45	58.0	20.0	180kg	-3250K
200mm	50	58.0	20.0	250kg	-3260K

Wheel Diameter	Overall Height	Max. Load	With Brake	Order Code ATL-945
Zinc Finish				
80mm	106	70kg	Yes	-2540K
			No	-2520K
100mm	128	90kg	Yes	-2630K
			No	-2610K
125mm	155	130kg	Yes	-2730K
			No	-2710K
160mm	195	180kg	No	-2910K
			Yes	-3030K
200mm	235	250kg	No	-3010K

Maintenance & Personal Protection

MATLOCK *Panic Hardware*

This panic hardware range of emergency exit devices contains products that are certified to the European CEN standards **BS EN179 & BS EN1125** and offers a design to give optimum safety and security. All products meet with the required standards in today's market. They have an anti-thrust mechanism to protect against attack, they carry a ten year manufacturer's guarantee and are two hour fire rated. Standard sized units are suitable for doors up to 2440mm high and 1220mm wide. Special sized vertical shoots, horizontal bars, keeps and pullman catch kits are available on request.

BS EN1125 Classification

This is the European standard for Panic Exit Devices. This determines that a Panic device must be fitted where members of the public are present and have no prior knowledge of the exit or hardware.

BS EN179 Classification

This is the European standard for Emergency Exit Devices. This determines that in emergency situations occupants will have prior knowledge of the exit and panic situation is unlikely to occur. Each standard is tested and evaluated and a 9 digit code is produced. BS EN 1125 & BS EN 179 are harmonised under the Construction Products Directive and products must therefore carry the CE mark.



Push Bar Panic Latch

Suitable for public areas. Certified for use on fire doors. CE marked for safety. Tested to **BS EN 179** and **EN1125**. 2 hour fire rated.



Finish	Order Code
Silver	MTL-949 -6010K

Push Pad Panic Latch

Suitable for offices, business premises etc. Certified for use on fire doors. CE marked for safety. Tested to **BS EN 179** and **EN1125**. 2 hour fire rated.



Finish	Order Code
Silver	MTL-949 -6020K

Outside Access Device

Suitable for use on fire doors. Supplied with euro cylinder. Three keys included. 2 hour fire rated.



Finish	Order Code
Silver	MTL-949 -6040K

Push Bar Single Panic Bolt

Suitable for single and double flush fitting doors. Certified for use on fire doors. CE marked for safety. Tested to **BS EN 179** and **EN1125**. 2 hour fire rated.



Finish	Order Code
Silver	MTL-949 -5990K

Push Pad Panic Bolt

Suitable for offices, business premises etc. Certified for use on fire doors. CE marked for safety. Tested to **BS EN 179** and **EN1125**. 2 hour fire rated.



Finish	Order Code
Silver	MTL-949 -6030K

Double Panic Bolt Set

Suitable for rebated double doors. Certified for use on fire doors. CE marked for safety. Tested to **BS EN 179** and **EN1125**. 2 hour fire rated.



Finish	Order Code
Silver	MTL-949 -6000K

Maintenance & Personal Protection

MATLOCK Door Controls



This comprehensive range of Door Controls feature varying power sized units for many different door applications. They come with a choice of architectural covers which are each available in 26 different plated or colour coated finishes. To help select the correct closer for you, each unit has a listing showing their key features, certification numbers and fire ratings. Plated arms are available on certain units only, and test certificates are available upon request.

BS EN1154 Classification

This standard classifies door closers using a 6 digit coding system. Each digit relates to a particular feature of the product measured against the standards performance requirements.

Digit (1) - Category of use:

'3' denotes the unit is for closing doors from at least 105°.
'4' denotes the unit is for closing doors from 180° open.

Digit (2) - Durability:

'8' successfully completed 500,000 test cycles.

Digit (3) - Test door mass/size:

Seven grades are identified as shown in the table below (where a closer provides a range of power sizes both the minimum and maximum sizes shall be shown):

Power size	Test door mass	Recommended door leaf width
1	20kg	750mm
2	40kg	850mm
3	60kg	950mm
4	80kg	1100mm
5	100kg	1250mm
6	120kg	1400mm
7	160kg	1600mm

Digit (4) - Fire behaviour:

'0' denotes the unit is **NOT** suitable for use on fire/smoke doors.
'1' denotes the unit **IS** suitable for use on fire/smoke doors.

Digit (5) - Safety in use:

'1' all door closer units are required to satisfy the essential requirement of safety in use.

Digit (6) - Corrosion-resistance:

'0' - indicates no defined corrosion-resistance,
'1' - indicates mild corrosion-resistance,
'2' - indicates a moderate level of corrosion-resistance,
'3' - indicates high corrosion-resistance,
'4' - indicates very high corrosion-resistance.

Within this section units have been tested to **BS EN1154**, with many units also having been tested to current Certified testing and CE test criteria. Therefore, the 6 digit classification is shown against each of the varying units, thus indicating their performance and grading under **BS EN1154**.

Maintenance & Personal Protection

Budget Contract Door Closer

Size 3 Mechanism 28730

Silver finish. **CE** tested. Closing force size 3 (**EN1154**). Maximum door width 950mm. Suitable for doors 40 - 60kg. Adjustable latch action. Fire tested to **BS EN1634-1**. 1 hour fire rated. Self handing (fits to left or right hinged doors). 180° opening (retains control of door when opened 180°).

Specification:

CE 1121.
Certifire approved: CF600.
Meets EN1154: yes.
Fire tested to EN1634: 1½ hours.
Power size: 2 - 4.
Application: universal.
Arm assembly: projecting arm.
Architectural cover: mechanism only or 92 cover.
Closing speed: adjustable.
Latch action: adjustable.
Stand open option: yes.
(NOT for use on fire doors).
Backcheck: no.
Delayed action: no.
Guarantee: 10 years.



CE	3	8	3	1	1	3
1121	(1)	(2)	(3)	(4)	(5)	(6)

Description	Finish	Order Code
Mechanism only	Silver	-4030K
Covered Unit	Silver	-4040K

Overhead Door Closer

Size 2 - 4 Mechanism 28932

Silver or plated finish. **CE** tested. Certifire approved **CF600**. Closing force size 3 - 4 (**EN1154**). Maximum door width 850 - 1100mm. Suitable for doors 40 - 80kg. Fire tested to **BS EN1634**. 1 hour fire rated. Adjustable check action. Independent on/off latch action. Self handing (fits to left or right hinged doors). 180° opening (retains control of door when opened 180°).

Specification:

CE 1121.
Certifire approved: CF600.
Meets EN1154: yes.
Fire tested to EN1634: 2 hours.
Power size: 3 - 4.
Application: universal.
Arm assembly: projecting arm.
Architectural cover: 91.
Check action: adjustable.
Closing speed: adjustable.
Stand open option: yes.
(NOT for use on fire doors).
Backcheck: yes.
Delayed action: yes.
Guarantee: 10 years.



CE	4	8	4	3	1	1	3
1121	(1)	(2)	(3)	(4)	(5)	(6)	

Description	Finish	Order Code
Covered Unit	Silver	-4010K
Covered Unit	Plated	-4020K

Concealed Door Closer

Concealed spring type closer. Spring tension closing force Adjustable. Certified to **BS 476 Pt. 22:1987**. ½ hour fire rated. Left or right hand fitting. Suitable for use on doors up to 50kg.



Finish	Order Code
Chrome	-4070K
Brass	-4080K

Electro-Magnetic Fire Stay

Silver or plated finish. Electro-magnetic holds open fire doors but releases in the event of fire. Closing force size 4 (**EN1155**). Maximum door width 950 - 1100mm. Suitable for doors 60 - 80kg. Adjustable check action. Adjustable latch action. Hold open from 70° - 180°.



3	8	1	1	1	3
(1)	(2)	(3)	(4)	(5)	(6)

Description	Finish	Order Code
Covered Unit	Silver	-4050K
Covered Unit	Plated	-4060K

MATLOCK 5 Lever Detainer Sashlock

Kitemarked to **BS3621**. Insurance approved sashlock, easily reversible latchbolt, five detainer mechanism, 64mm (2½") and 76mm (3") case size available. Supplied with square or radius forend and strike. Supplied with two keys. Satin chrome plate and polished brass finish.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
64mm (2½")	-4090K
76mm (3")	-4100K
Polished Brass Finish	
64mm (2½")	-4110K
76mm (3")	-4120K

3 Lever Deadlock

64mm (2½") and 76mm (3") case size available. Supplied with radius forend and strike. Supplied with two keys. Satin chrome plate and polished brass finish.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
64mm (2½")	-4250K
76mm (3")	-4260K
Polished Brass Finish	
64mm (2½")	-4270K
76mm (3")	-4280K

Euro Profile Deadlock Case

For internal and external door use. 64mm (2½") and 76mm (3") case size available. Brass or nickel plated forend and strike. Supplied with square forend and strike. Satin chrome plate and polished brass finish.



Size	Order Code MTL-949
Satin Chrome Plate Finish	
64mm (2½")	-4290K
76mm (3")	-4300K
Polished Brass Finish	
64mm (2½")	-4310K
76mm (3")	-4320K

5 Lever Detainer Deadlock

Kitemarked to **BS3621**. Insurance approved sashlock, easily reversible latchbolt, five detainer mechanism, 64mm (2½") and 76mm (3") case size available. Supplied with square forend strike. Supplied with two keys. Satin chrome plate or polished brass finish.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
64mm (2½")	-4130K
76mm (3")	-4140K
Polished Brass Finish	
64mm (2½")	-4150K
76mm (3")	-4160K

Bathroom Lock

Easily reversible latchbolt, adjustable springing feature. 8mm turn follower for internal door applications. Latchbolt operated by lever handles, deadbolt thrown by internal turn. 64mm (2½") and 76mm (3") case sizes available. Supplied with square forend strike. Satin chrome plate or polished brass finish.



Size (5mm follower)	Order Code MTL-949
Satin Chrome Plated Finish	
64mm (2½")	-4330K
76mm (3")	-4340K
Polished Brass Finish	
64mm (2½")	-4350K
76mm (3")	-4360K

Tubular Mortice Latch

64mm (2½") and 76mm (3") case size available. Satin chrome plate and polished brass finish.



Size (5mm follower)	Order Code MTL-949
Satin Chrome Plate Finish	
64mm (2½")	-4370K
76mm (3")	-4380K
Polished Brass Finish	
64mm (2½")	-4390K
76mm (3")	-4400K

3 Lever Sashlock

Easily reversible latchbolt, adjustable springing feature, 64mm (2½") and 76mm (3") case size available, supplied with square or forend strike. Supplied with two keys. Satin chrome plate or polished brass finish.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
64mm (2½")	-4210K
76mm (3")	-4220K
Polished Brass Finish	
64mm (2½")	-4230K
76mm (3")	-4240K

Euro Profile Sashlock Case

Easily reversible latchbolt for internal and external door use. 64mm (2½") and 76mm (3") case size available. Brass or nickel plated forend and strike. Supplied with square forend strike. Satin chrome plate or polished brass finish.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
64mm (2½")	-4170K
76mm (3")	-4180K
Polished Brass Finish	
64mm (2½")	-4190K
76mm (3")	-4200K

Europrofile Cylinder & Turn

70mm (35/35). Polished Brass or Satin Chrome Plate Finishes.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
35mm/35mm	-4430K
Polished Brass Finish	
35mm/35mm	-4440K

Europrofile Double Cylinder

70mm (35/35). Polished Brass or Satin Chrome Plate Finishes.



Size	Order Code MTL-949
Satin Chrome Plated Finish	
35mm/35mm	-4410K
Polished Brass Finish	
35mm/35mm	-4420K

Maintenance & Personal Protection

MATLOCK Roundbar Furniture

Aluminium Lever

Aluminium finish. 19 and 22mm DDA aluminium return to door lever on 50mm concealed sprung rose. Supplied with face fixing and bolt through screws.



DDA & BS8300 Compliant

Size	Order Code
50mm Sprung Rose	
19mm	-4490K
22mm	-4500K

Aluminium finish. 19mm return to door DDA aluminium sprung lever on concealed oblong. Backplate 153 x 45mm.




DDA & BS8300 Compliant

Type	Order Code
MTL-949	
Latch	-4540K
Lock	-4550K
Euro	-4560K
Oval	-4570K
Bath	-4580K

Aluminium Pull Handles

Aluminium finish. 19 and 22mm roundbar pull handles

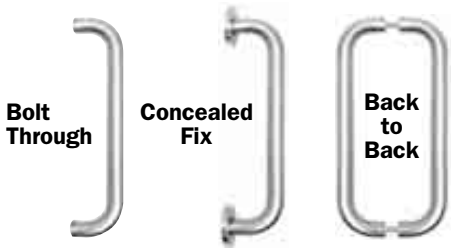

Centres	Order Code
MTL-949	
Bolt Through (19mm Dia.)	
150mm	-4810K
225mm	-4840K
300mm	-4870K
Concealed Fix (19mm Dia.)	
150mm	-4820K
225mm	-4850K
300mm	-4880K
Back to Back (19mm Dia.)	
150mm	-4830K
225mm	-4860K
300mm	-4890K
Bolt Through (22mm Dia.)	
150mm	-4900K
225mm	-4930K
300mm	-4960K
450mm	-4990K
600mm	-5120K
Concealed Fix (22mm Dia.)	
150mm	-4910K
225mm	-4940K
300mm	-4970K
450mm	-5000K
600mm	-5130K
Back to Back (22mm Dia.)	
150mm	-4920K
225mm	-4950K
300mm	-4980K

DDA & BS8300 Compliant

Stainless Steel Lever

19 and 22mm bar lever. Stainless steel and polished stainless steel finishes on 50mm concealed sprung rose. Supplied with face fixing and bolt through screws.



Type	Order Code
MTL-949	
50mm Sprung Rose	
Latch	-4510K
Latch	-4520K


19mm bar lever. Stainless steel and polished stainless steel finishes. Concealed oblong plate: 45 x 153mm.



Type	Order Code
MTL-949	
Latch	-4590K
Lock	-4600K
Euro	-4610K
Oval	-4620K
Bath	-4630K

Stainless Steel Pull Handles

Stainless Steel finish. 19 and 22mm roundbar pull handles.

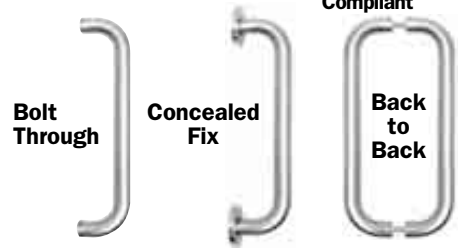

DDA & BS8300 Compliant

Centres	Order Code
MTL-949	
Bolt Through (19mm Dia.)	
150mm	-5140K
225mm	-5170K
300mm	-5200K
425mm	-5230K
600mm	-5260K
Concealed Fix (19mm Dia.)	
150mm	-5150K
225mm	-5180K
300mm	-5210K
425mm	-5240K
Back to Back (19mm Dia.)	
150mm	-5160K
225mm	-5190K
300mm	-5220K
425mm	-5250K
600mm	-5270K
Bolt Through (22mm Dia.)	
150mm	-5280K
225mm	-5310K
300mm	-5330K
425mm	-5360K
600mm	-5390K
Concealed Fix (22mm Dia.)	
150mm	-5290K
225mm	-5320K
300mm	-5340K
425mm	-5370K
Back to Back (22mm Dia.)	
150mm	-5300K
225mm	-5325K
300mm	-5350K
425mm	-5380K
600mm	-5400K

Polished Brass Lever

Polished brass finish. 19mm brass bar lever. Concealed rose: 50mm.



Type	Order Code
MTL-949	
50mm Sprung Rose	
Latch	-4530K


Polished Brass finish. 19mm return to door sprung lever on concealed oblong. Backplate 153 x 45mm.



Type	Order Code
MTL-949	
Latch	-4640K
Lock	-4650K
Euro	-4660K
Oval	-4670K
Bath	-4680K

Polished Brass Pull Handles

Polished brass finish. 19mm roundbar pull handles.

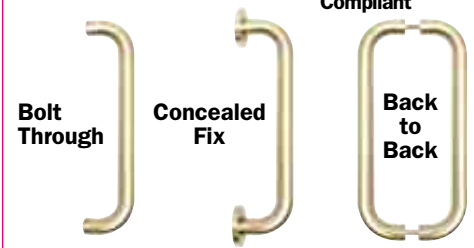

DDA & BS8300 Compliant

Centres	Order Code
MTL-949	
Bolt Through (19mm Dia.)	
150mm	-5410K
225mm	-5440K
300mm	-5470K
Concealed Fix (19mm Dia.)	
150mm	-5420K
225mm	-5450K
300mm	-5480K
Back to Back (19mm Dia.)	
150mm	-5430K
225mm	-5460K
300mm	-5490K

Escutcheons, Turns & Indicators

Polished Brass
Brass plated finish.



Type	Order Code
MTL-949	
Euro	-4770K
Oval	-4780K
Lock	-4790K
Bathroom	-4800K

Maintenance & Personal Protection

MATLOCK



Escutcheons, Turns & Indicators

Aluminium
Aluminium finish.



Type	Order Code
Euro	-4690K
Oval	-4700K
Lock	-4710K
Bathroom	-4720K

Stainless Steel
Stainless steel finish.



Type	Order Code
Euro	-4730K
Oval	-4740K
Lock	-4750K
Bathroom	-4760K

Letter Plates

Finished in aluminium and stainless steel.
Size: aluminium 355 x 125mm, stainless steel/polished brass 330 x 110mm.



Finish	Order Code
Aluminium	-5850K
Stainless Steel	-5860K
Polished Brass	-5870K

Coat Hooks

Finished in aluminium, stainless steel and brass.

Stainless Steel



Finish	Order Code
Aluminium	-5910K
Stainless Steel	-5920K
Brass	-5930K

Hat & Coat Hooks

Finished in aluminium, stainless steel and brass.

Stainless Steel



Finish	Order Code
Aluminium	-5880K
Stainless Steel	-5890K
Brass	-5900K

Blank Push Plates

Finished in aluminium, satin stainless steel and brass.
Size: 305 x 75mm.

Stainless Steel



Finish	Order Code
Aluminium	-5590K
Stainless Steel	-5600K
Brass	-5610K

Kick Plates

Finished in aluminium, satin stainless steel

Stainless Steel



Size	Order Code
Aluminium	
676x150mm	-5620K
701x150mm	-5630K
712x150mm	-5640K
737x150mm	-5650K
776x150mm	-5660K
788x150mm	-5670K
801x150mm	-5680K
813x150mm	-5690K
876x150mm	-5700K
901x150mm	-5710K

Satin Stainless Steel

676x150mm	-5720K
701x150mm	-5730K
712x150mm	-5740K
737x150mm	-5750K
776x150mm	-5760K
788x150mm	-5770K
801x150mm	-5780K
813x150mm	-5790K
876x150mm	-5800K
901x150mm	-5810K

Oval Door Stops

Finished in aluminium, stainless steel and brass.



Brass

Finish	Order Code
Aluminium	-5500K
Stainless Steel	-5510K
Brass	-5520K

Concealed Door Stops

Projecting door stop. Finished in aluminium, stainless steel and brass.
Size: 75mm.



Aluminium

Finish	Order Code
Aluminium	-5530K
Stainless Steel	-5540K
Brass	-5550K

Projecting Door Stops

Concealed fix projecting door stop. Finished in aluminium, stainless steel and brass.
Size: 75mm.



Aluminium

Finish	Order Code
Aluminium	-5560K
Stainless Steel	-5570K
Brass	-5580K

Flush Bolts

Finished in aluminium, stainless steel and brass.
Size: 200mm.



Brass

Finish	Order Code
Aluminium	-5820K
Stainless Steel	-5830K
Brass	-5840K

Budget Lever on Pressed Backplate

Aluminium finish.



Type	Order Code
Latch	-5940K
Lock	-5950K
Euro	-5960K
Oval	-5970K
Bath	-5980K

Stainless Steel 2 Ball Bearing Butt Hinge

523CE
Polished or Satin Stainless Steel finish. Grade 304 stainless steel. One hour fire tested. Stainless steel pin. Complete with screws.



Finish	Size (mm)	Order Code
Stainless Steel		
Satin	100 x 75 x 3	-4450K
Stainless Steel		
Polished	100 x 75 x 3	-4460K

Polished Brass 2 Ball Bearing Butt Hinge

525CE
Polished Brass or Brass Plated finishes. One hour fire tested. Stainless steel pin. Complete with screws.



Size (mm)	Order Code
100 x 75 x 3	-4470K

Polished Brass Butt Hinge

508
Double phosphor bronze washered finish. Brass pin. One year guarantee.




Size (mm)	Order Code
100 x 75 x 3	-4480K

Maintenance & Personal Protection

GROUP 949 DOOR & GATE FURNITURE

MATLOCK Cabin Hooks on Plates

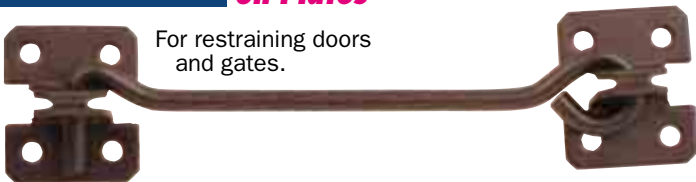

For restraining doors and gates.

Size (mm)	Finish	Order Code MTL-949
101 (4")	Galvanised	-7860K
101 (4")	Black	-7870K
152 (6")	Galvanised	-7880K
152 (6")	Black	-7890K

Cast Iron Decorative Cabin Hooks

Often used in stabling.



Length (mm)	Finish	Order Code MTL-949
101 (4")	Galvanised	-7900K
152 (6")	Galvanised	-7910K

Safety Hasps & Staples

Secure fixings are concealed by hasp when in locked position.



Length (mm)	Finish	Order Code MTL-949
101 (4")	Zinc Plated	-7920K
152 (6")	Zinc Plated	-7930K

Tee Hinges (Supplied as Pairs)



Light duty: suitable for low load applications such as animal hutches. Material thickness up to 1.8mm


Length (mm)	Finish	Order Code MTL-949
101 (4")	Galvanised	-7170K
101 (4")	Black	-7180K
152 (6")	Galvanised	-7190K
152 (6")	Black	-7200K
203 (8")	Galvanised	-7210K
203 (8")	Black	-7220K
254 (10")	Galvanised	-7230K
254 (10")	Black	-7240K
304 (12")	Galvanised	-7250K
304 (12")	Black	-7260K

Medium duty: suitable for medium load applications such as stable doors. Material thickness up to 2.6mm.

Length (mm)	Finish	Order Code MTL-949
254 (10")	Black	-7270K
254 (10")	Galvanised	-7280K
304 (12")	Black	-7290K
304 (12")	Galvanised	-7300K
355 (14")	Galvanised	-7310K
355 (14")	Black	-7320K
406 (16")	Galvanised	-7330K
406 (16")	Black	-7340K
457 (18")	Galvanised	-7350K
457 (18")	Black	-7360K

Self Closing Gate Springs


Tension adjustable and suitable for left or right hand use on domestic doors and gates.

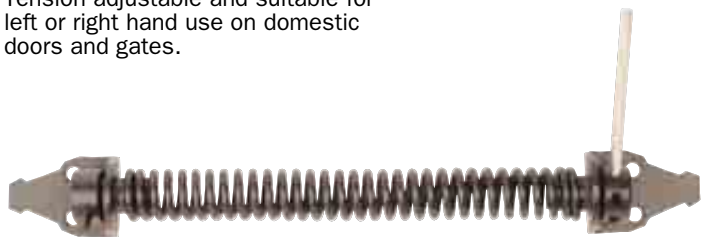

Length (mm)	Finish	Order Code MTL-949
203 (8")	Black	-7970K

Medium Strap Hinges

Supplied as pairs. Commonly used for lift-up lids and traps.



Length (mm)	Finish	Order Code MTL-949
203 (8")	Self-colour	-7640K
254 (10")	Self-colour	-7650K
305 (12")	Self-colour	-7660K

Heavy Swivel Hasps & Staples

Rotating, padlockable, heavy hasp and staple.



Length (mm)	Finish	Order Code MTL-949
203 (8")	Galvanised	-7080K
203 (8")	Black	-7090K
254 (10")	Black	-7100K

NEW

Extra heavy duty: for very high load applications such as for farm field gates. Material thickness up to 4mm.

Length (mm)	Finish	Order Code MTL-949
152 (6")	Self-colour	-7490K
152 (6")	Galvanised	-7500K
203 (8")	Self-colour	-7510K
203 (8")	Galvanised	-7520K
254 (10")	Self-colour	-7530K
254 (10")	Galvanised	-7540K
304 (12")	Self-colour	-7550K
304 (12")	Galvanised	-7560K
355 (14")	Self-colour	-7570K
355 (14")	Galvanised	-7580K
406 (16")	Self-colour	-7590K
406 (16")	Galvanised	-7600K
457 (18")	Self-colour	-7610K
457 (18")	Galvanised	-7620K
508 (20")	Galvanised	-7630K

Heavy duty: for high load applications such as for domestic gates and doors. Material thickness up to 3mm

Length (mm)	Finish	Order Code MTL-949
254 (10")	Galvanised	-7370K
304 (12")	Galvanised	-7380K
304 (12")	Black	-7390K
355 (14")	Galvanised	-7400K
355 (14")	Black	-7410K
406 (16")	Galvanised	-7420K
406 (16")	Black	-7430K
457 (18")	Galvanised	-7440K
457 (18")	Black	-7450K
508 (20")	Galvanised	-7460K
610 (24")	Galvanised	-7470K
610 (24")	Black	-7480K


Maintenance & Personal Protection



MATLOCK

Auto Gate Catches

Padlockable gate
catcher for
garden gates.

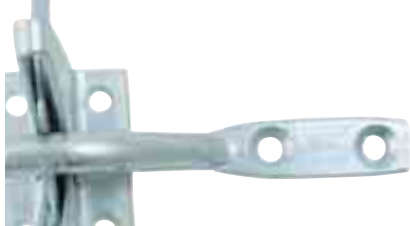

Size	Finish	Order Code MTL-949
Small	Galvanised	-7010K
Small	Black	-7020K
Large	Galvanised	-7030K

Door/Gate Stops

Pair of door and gate stops
complete with screws and
rubber stopper.



Length (mm)	Finish	Order Code MTL-949
152 (6")	Grey Japanned	-7700K

Auto Pig Lock Bolts

Autolock bolts with bottom
guard to prevent fouling
of the latch.



Length (mm)	Finish	Order Code MTL-949
203 (8")	Zinc Plated	-7840K

Brenton Bolts

Padlockable security bolt.



Length x Shoot Dia. (mm)	Finish	Order Code MTL-949
101 x 12 (4" x 1/2")	Galvanised	-7710K
152 x 12 (6" x 1/2")	Galvanised	-7720K
203 x 12 (8" x 1/2")	Galvanised	-7730K
152 x 15 (6" x 5/8")	Galvanised	-7740K
203 x 15 (8" x 5/8")	Galvanised	-7750K

Monkey Tail Bolts

General duty.



Length (mm)	Finish	Order Code MTL-949
455 (18")	Black	-7040K

Round Garage Door Bolts

For bottom fixing of garage doors or field gates.



Length x Shoot Dia. (mm)	Finish	Order Code MTL-949
305 x 15 (12" x 5/8")	Galvanised	-7050K
457 x 15 (18" x 5/8")	Galvanised	-7070K
457 x 15 (18" x 5/8")	Black	-7060K

Suffolk Latches

Suffolk latches
complete with
long thumb bit.



Size	Finish	Order Code MTL-949
No. 3	Galvanised	-7130K
No. 3	Black	-7140K
No. 5	Galvanised	-7150K
No. 5	Black	-7160K

Spring Loaded Animal Bolts

Spring loaded bolt with
staple on plate, suitable
for gates, paddocks etc.



Length (mm)	Finish	Order Code MTL-949
12 (1/2")	Zinc Plated	-7850K

Oval Pad Bolts

Space saving
padlockable bolt.



Shoot Length (mm)	Finish	Order Code MTL-949
101 (4")	Galvanised	-7830K

Ring Gate Latches


Original ring handled straight gate latches.



Latch Length (mm)	Finish	Order Code MTL-949
152 (6")	Galvanised	-7110K
152 (6")	Black	-7120K

Spring Loaded Bolts

Spring loaded bolt suitable for metal or
wooden gates.

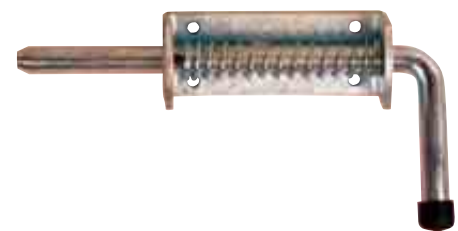

Shoot Dia. (mm)	Finish	Order Code MTL-949
10 (3/8")	Zinc Plated	-7670K
12 (1/2")	Zinc Plated	-7680K
15 (5/8")	Zinc Plated	-7690K

Tower Bolts

General purpose bolts often used on shed
doors.



Length (mm)	Finish	Order Code MTL-949
76 (3")	Black	-7760K
101 (4")	Galvanised	-7770K
101 (4")	Black	-7780K
152 (6")	Galvanised	-7790K
152 (6")	Black	-7800K
203 (8")	Black	-7810K
254 (10")	Black	-7820K

Maintenance & Personal Protection

MATLOCK Security Ratings

All padlocks have a rating to indicate how secure they are, this is based on material, hardening, extra coating, shackle diameter, body width, and other security features such as anti-pick locks and 3, 4, 5 or 6 pin cylinders.



Rating	Uses
1 - 2	Minimum security for indoor and outdoor use on tackle boxes, suitcases and drawers etc.
3 - 4	Minimum to medium security for indoor and outdoor use on garages, cabinets, toolboxes, gates, truck doors, lockers, sheds, bicycles etc.
5 - 6	Medium security for indoor and outdoor use on garages, cabinets, toolboxes, gates, truck doors, lockers, sheds, bicycles etc.
7 - 8	Medium to maximum security for indoor and outdoor use on store front and factory gates, large tool chests, construction site storage etc.
9 - 10	Maximum security for indoor and outdoor use on store front and factory gates, large tool chests and construction site storage etc.

Brass

Solid brass body with a hardened steel shackle and a double locking mechanism. For indoor and outdoor use on minimum to medium security items. 20mm: 3 pin cylinder. 30 and 40mm: 4 pin cylinder, 50 and 60mm: 5 pin cylinder.*Single locking only.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
20mm	3.7 x 10.3mm	2*	50g	-6722K
30mm	4.8 x 15mm	3	100g	-6733K
30mm	4.8 x 50mm	3	130g	-6732K
40mm	4.8 x 22mm	3	170g	-6743K
40mm	7.0 x 50mm	4	190g	-6745K
50mm	7.0 x 26mm	4	280g	-6754K
60mm	8.8 x 27mm	4	430g	-6764K

Brass - Stainless Steel Shackle

Traditional style brass bodied padlock with a stainless steel shackle and a double locking mechanism. For indoor and outdoor use on many minimum to medium security items. 20mm: 3 pin cylinder, 30 and 40mm: 4 pin cylinder, 50 and 60mm: 5 pin cylinder. * Single locking only



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
20mm	3.7 x 10.3mm	2*	50g	-7022K
30mm	4.8 x 15mm	3	100g	-7033K
40mm	4.8 x 22mm	3	170g	-7043K
50mm	7.0 x 26mm	4	275g	-7054K
60mm	8.8 x 27mm	4	430g	-7064K

Brass Slimline

Solid brass body with a hardened steel changeable shackle. For indoor and outdoor use on minimum to medium security items.



Key Change Every

20mm	6
25mm	12
30mm	24
40-50mm	36

Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
20mm	3.2 x 12mm	2	40g	-6820K
25mm	4.8 x 15mm	3	55g	-6825K
30mm	4.8 x 15mm	3	70g	-6830K
30mm	5 x 43mm	3	90g	-6832K
40mm	6 x 20mm	4	125g	-6840K
50mm	7 x 25mm	4	200g	-6850K

Laminated Brass - Combination Type

Laminated brass body with a brass shackle and a double locking mechanism. Available with four number tumbler (10,000 combinations) or three number tumbler (1,000 combinations). For indoor and outdoor use on minimum to medium security items.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Combination Number	Weight each	Order Code MTL-950
40mm	6 x 25mm	3	3	210g	-6203K
46mm	8 x 25mm	3	4	280g	-6263K

Laminated Steel

Laminated steel body with a hardened steel shackle, a double locking mechanism and a 5 pin cylinder. For indoor and outdoor use on medium to maximum security items.

Key change every 1,000 (30mm every 200).



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
30mm	5.2 x 18.5mm	4	220g	-5514K
40mm	6.3 x 25mm	5	265g	-5525K
44mm	7.0 x 25mm	5	330g	-5555K
50mm	8.8 x 25mm	7	500g	-5587K
65mm	11 x 34mm	8	600g	-5598K

Maintenance & Personal Protection

MATLOCK Brass - Cross Key

Solid brass body with a hardened steel shackle and a double locking mechanism. Fitted with a dual lever 4 row 16 pin cylinder which has 1000 different key numbers. For indoor and outdoor use on minimum to medium security items. **Key change every 100,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
40mm	6.8 x 25mm	4	255g	-3844K
50mm	8.8 x 32mm	5	380g	-3855K
60mm	1.1 x 35mm	5	540g	-3865K

Laminated Brass

Laminated brass body with a hardened steel shackle, a double locking mechanism and a pin cylinder. For indoor and outdoor use on minimum to medium security items. **Key change every 1,000.**



Body Width	Shackle Dia. x Clearance	Rating (1-10)	Weight each	Order Code MTL-950
40mm	6.3 x 20mm	4	240g	-5824K
50mm	8.8 x 25mm	4	400g	-5834K

Laminated Steel - Combination Type

Laminated steel, nickel plated body with a hardened steel shackle and a double locking mechanism. Available with four number tumbler (10,000 combinations) or three number tumbler (1,000 combinations). For indoor and outdoor use on minimum to medium security items.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Combination Number	Weight each	Order Code MTL-950
40mm	6 x 25mm	4	3	185g	-6004K
40mm	6 x 45mm	4	3	200g	-6024K
46mm	8 x 25mm	4	4	270g	-6064K

Brass - Anti-pick Weatherproof

Solid brass body with a hardened stainless steel changeable shackle and a double locking mechanism. Fitted with a hardened steel cover plate and an anti-pick 6 pin brass cylinder. Completely weatherproof padlock which is suitable for use in the harshest corrosive conditions on minimum to medium security items. **Key change every 20,000.**



HARDENED SHACKLE



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
38mm	6.3 x 25mm	4	310g	-3554K
38mm	6.3 x 50mm	4	320g	-3574K
45mm	8 x 25mm	5	370g	-3655K
45mm	8 x 50mm	5	385g	-3675K
50mm	9.5 x 25mm	6	415g	-3756K
50mm	9.5 x 50mm	6	450g	-3776K

Aluminium - Anti-Pick Weatherproof

Solid anodised lightweight aluminium body with a hardened stainless steel changeable shackle. Fitted with an anti-pick 6 pin brass cylinder and a double locking mechanism. Weatherproof padlock which is suitable for use in the harshest corrosive conditions on medium security items. **Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
38mm	6.3 x 25mm	5	195g	-5005K
38mm	6.3 x 50mm	5	200g	-5025K
50mm	9.5 x 25mm	5	255g	-5205K
50mm	9.5 x 50mm	5	280g	-5225K

Weather Resistant - Long Shackle

Laminated steel body with hardened steel shackle, double locking mechanism and anti-pick cylinder. The PU coating makes this the most weather-resistant padlock. Ideally suitable for medium security for indoor and outdoor use in the harshest corrosive environments. For use on marine/brewery storage, haulage and warehouses etc. Available in a range of colours. All fitted with a weather resistant key cover.



Body Width	Colour	Shackle Dia. x Clearance	Rating (1 - 10)	Order Code MTL-950
Long Shackle				
45mm	Red	8.1 x 55mm	5	-7615K
54mm	Yellow	10.7 x 46mm	6	-7626K

Maintenance & Personal Protection

GROUP 950 PADLOCKS

MATLOCK Solid Steel Heavy Duty

Hardened solid steel, chrome and duplex nickel plated body with a hardened changeable steel shackle. Fitted with a double locking mechanism, hardened steel cover plate and an anti-pick six pin brass cylinder. For indoor and outdoor use on maximum security items. **Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
63.5 x 76	11 x 25mm	9	680g	-1509K
63.5 x 76	11 x 50mm	9	725g	-1529K
63.5 x 76	11 x 75mm	9	770g	-1539K

Solid Steel - Anti-pick Shrouded

Hardened solid steel, chrome and duplex nickel plated body with a hardened changeable steel shackle. Fitted with a double locking mechanism, hardened steel cover plate and an anti-pick six pin brass cylinder. For indoor and outdoor use on medium to maximum security items. **Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
50mm	9.5 x 25mm	7	480g	-2027K
63.5mm	11 x 25mm	9	830g	-2039K

Solid Steel Anti-pick


Hardened solid steel, chrome and duplex nickel plated body with a hardened steel changeable shackle and a double locking mechanism. Fitted with a hardened steel cover plate and an anti-pick 6 pin brass cylinder. For indoor and outdoor use on medium to maximum security items. **Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
50 x 76	9.5 x 25mm	7	400g	-1107K
50 x 76	9.5 x 50mm	7	430g	-1127K
50 x 76	9.5 x 75mm	7	460g	-1137K
63.5 x 76	11 x 25mm	9	710g	-1209K
63.5 x 76	11 x 50mm	9	755g	-1229K
63.5 x 76	11 x 75mm	9	800g	-1239K

Solid Steel - Anti-pick, Anti-cut

Hardened solid steel, chrome and duplex nickel plated body with a molybdenum alloy anti-cut changeable steel shackle. Fitted with a double locking mechanism and an anti-pick six pin brass cylinder. For indoor and outdoor use on medium to maximum security items. **Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
50 x 76	9.5 x 25mm	8	400g	-2508K
50 x 76	9.5 x 50mm	8	430g	-2528K
50 x 76	9.5 x 75mm	8	455g	-2538K
63.5 x 76	11 x 25mm	9	710g	-2609K
63.5 x 76	11 x 50mm	9	755g	-2629K
63.5 x 76	11 x 75mm	9	800g	-2639K

Brass Anti-pick

Solid brass body with a hardened steel changeable shackle and a double locking mechanism. Fitted with a hardened steel cover plate and an anti-pick 6 pin brass cylinder. For indoor and outdoor use on minimum to medium security items. **Key change every 20,000.**



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
38 x 76	6.3 x 25mm	4	310g	-3054K
38 x 76	6.3 x 50mm	4	320g	-3074K
38 x 76	6.3 x 75mm	4	335g	-3094K
50 x 76	9.5 x 25mm	6	420g	-3206K
50 x 76	9.5 x 50mm	6	445g	-3226K
50 x 76	9.5 x 75mm	6	475g	-3236K

Maintenance & Personal Protection



MATLOCK Weather Resistant - Shrouded Shackles

Laminated steel body with hardened steel shackle, double locking mechanism and anti-pick cylinder. The PU coating makes this the most weather-resistant padlock. Ideally suitable for medium security for indoor and outdoor use in the harshest corrosive environments. For use on marine/brewery storage, haulage and warehouses etc. Available in a range of colours. All fitted with a weather-resistant key cover.



Body Width	Colour	Shackle Dia x Clearance	Rating (1 - 10)	Order Code MTL-950
Covered Shackle				
50mm	Blue	8 x 33mm	6	-7716K
62mm	Black	10 x 30mm	8	-7728K
75mm	Yellow	11 x 34mm	9	-7759K

Weather Resistant

Laminated steel body with hardened steel shackle, double locking mechanism and anti-pick cylinder. The PU coating makes this the most weather-resistant padlock. Ideally suitable for medium security for indoor and outdoor use in the harshest corrosive environments. For use on marine/brewery storage, haulage and warehouses etc. Available in a range of colours. All fitted with a weather-resistant key cover.



Body Width	Colour	Shackle Dia x Clearance	Rating (1 - 10)	Order Code MTL-950
Standard				
45mm	Red	8.1 x 18mm	5	-7515K
54mm	Green	10.7 x 20mm	6	-7526K
69mm	Black	9 x 30mm	7	-7537K

'Anti-Cut' U-Bar

Molybdenum alloy steel, 'anti-cut' shackle. Vinyl coated U-bar. Suitable for indoor and outdoor use.



Body Width	Shackle Dia. x Clearance	Rating (1 - 10)	Weight each	Order Code MTL-950
30mm	15 x 135mm	7	0.90kg	-6527K
30mm	15 x 200mm	7	1.10kg	-6507K
30mm	15 x 270mm	7	1.20kg	-6517K

Security Hasps

Manufactured from hardened steel with a duplex nickel plated anti-corrosive finish. The hinge pins, fixings and assembly are concealed with a folded edge for tamper protection. Supplied with fixing screws.

Double Hinged:

Models can be used for internal and external corner mounting.

Triple Hinged:

Models also allow for use on non-flush fitting (stepped) surfaces.

8120, 8110, 8100* & 8150*:

For use on standard duty and domestic applications.

8200* & 8160*:

For use on medium duty applications. *Supplied complete with door reinforcement plates for improved security.



-8120K
2
SECURITY RATING



-8110K
2
SECURITY RATING



-8100K
3
SECURITY RATING



-8150K
3
SECURITY RATING



-8200K
3
SECURITY RATING



-8160K
3
SECURITY RATING

Product Number	Shackle Type	Hinge Type	Size (mm)	To Suit Shackle	Order Code MTL-950
8120	Vertical	Single	92 x 37	8mm	-8120K
8110	Vertical	Single	120 x 45	8mm	-8110K
8100	Horizontal	Single	125 x 45	11mm	-8100K
8150	Horizontal	Double	160 x 45	11mm	-8150K
8200	Horizontal	Triple	200 x 45	11mm	-8200K
8160	Vertical	Triple	258 x 62	13mm	-8160K

Digital Door Locks

Digital door locks suitable for: offices, banks, warehouses, laboratories, schools, hospitals, flats, apartments or any restricted areas. Resettable combination. Tamper-proof latchbolt. Weather resistant. Simple to fit. Internal and external applications.




Body Finish	Key Lock Override	Order Code MTL-949
Satin Chrome	No	-5020K
Satin Chrome	Yes	-5040K

Maintenance & Personal Protection

GROUP 952 PAPER WIPES & TISSUES

SOLENT Hand Towels **NEW**

'Z-Fold'
High quality 1-ply blue paper towels. For the most cost efficient and hygienic solution to hand drying. When the towel is pulled out the next towel is presented for use - eliminates problems associated with cross contamination of towels in medical and food industry applications. Small towel size minimises cost and waste. Can be topped up during use - need never run out.

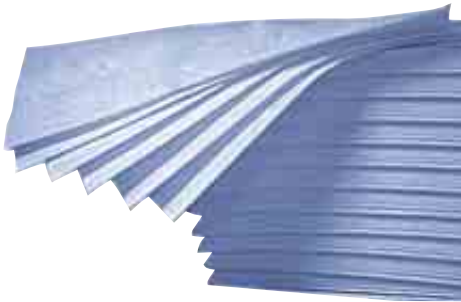

Type	Colour	Sheet Size (cm)	Order Code SOL-952
1-Ply	Blue	24 x 24	-2680A
2-Ply	White	24 x 24	-2690B
1-Ply	Blue	21 x 25	-2700M

'Z-Fold' Dispenser
Durable white ABS dispensers. Lockable with keys provided.

Description	Weight each	Order Code SOL-952
C/Z-Fold Towel Dispenser		-9050B

Hand Towels

'C-Fold'
High quality 2-ply white paper towels.

'Soft'
Has maximum softness and absorbency, designed for use in washrooms where disposal bins are provided. Single-sheet dispensing discourages pilfering and minimises wastage. Use with CTD201 dispenser, which can be topped up at any time. Supplied in cases of 2400 sheets.





EXTENDED RANGE

Description	Sheet Size (cm)	Order Code SOL-952
'Soft' 2-Ply	23 x 33	-2600K
'Luxury' 2-Ply	23 x 33	-2980M

'Flat Pack' Interleaved Toilet Tissue **NEW**

High quality 2-ply white tissue. 'One sheet at a time' dispensing discourages pilfering and minimises wastage. Use with FTD119 dispenser, which can be topped up at any time. Supplied in cases of 36 packs, 250 sheets per pack.

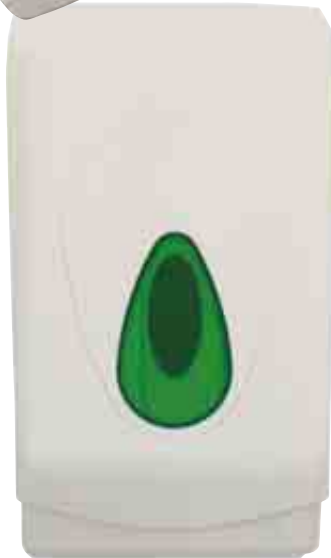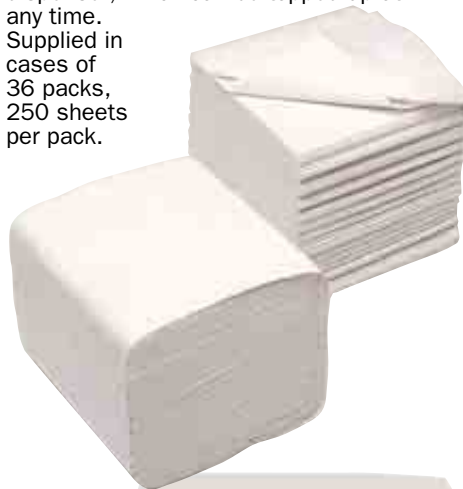

Description	Case Qty.	Order Code SOL-952	Price/Pk
2-Ply White Interleaved	9000		-2200A

'C-Fold' Dispenser

Durable white ABS dispensers. Lockable with keys provided.



Description	Weight each	Order Code SOL-952
C/Z-Fold Towel Dispenser		-9050B

Toilet Rolls **NEW**

S-T-Roll
High quality 2-ply white toilet tissue. Suitable for domestic and professional use.


Standard Roll
36 rolls per case. 200 sheets per roll.



Sheets/ Roll	Pack Quantity	Order Code SOL-952
200	36	-2250C

'Stroll' Jumbo & Mini Jumbo Toilet Rolls

High quality 2-ply white tissue. Choice of roll lengths to suit all traffic areas, pricing maximum economy and flexibility with less time spent re-filling. Suitable for away-from-home locations such as commercial premises, restaurants, hotels and pubs, factories and offices. Lockable dispensers help to keep the product clean and discourage pilfering. Use with JTD001 Jumbo and MTD003 Mini Jumbo dispensers. Supplied in cases of 6 x Jumbo rolls or 12 x Mini Jumbo rolls.

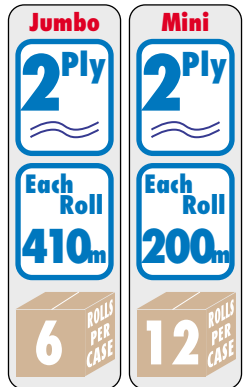


Description	Roll Size	Core Size	Order Code SOL-952
J-Stroll Jumbo	410m	57mm	-3200W
M-Stroll Mini	200m	57mm	-3300Y
M-Stroll Mini	200m	76mm	-3320Z

Maintenance & Personal Protection

SOLENT High Quality 100% Tissue Wipes
CLEANING & HYGIENE

Wiper Box

Thick, bulky and strong paper wipes. High performance yet incredibly economical wiping solution, ideal for surface wiping, mopping spills cleaning tools and equipment and process wiping. Suitable for factory workshops, valeting, maintenance automotive and agricultural industry. 400 sheets per box.



Each sheet 40 x 26cm

Colour	Roll Size	Order Code
White	26cm x 160m	SOL-952

'Centre-Feed' Rolls

Available as single ply wipes suitable for general wiping or as two ply heavy duty wipes. Supplied on rolls with a removal cardboard core to allow them to be used either as centre feed rolls in a dispenser or with the core still in place on a floor stand. The wipes are ideally suitable for all garage, workshop applications and most general industrial and automotive object wiping applications. Each roll is perforated for easier dispensing of each sheet. Available as blue or white rolls in five different roll widths and lengths.



Type	Colour	Roll Size (cm x m)	Order Code
2-Ply	White	19.0 x 150	-2500G
2-Ply	Blue	19.0 x 150	-2550H
1-Ply	White	23.0 x 288	-2555Q
2-Ply	Blue	19.5 x 144	-2560S
2-Ply	White	19.5 x 144	-2570T



EXTENDED RANGE

General Purpose Rolls

'Hygiene' Green

Long lasting single ply paper towels. Medium duty for catering and general hygiene use. Unperforated - cut to size to suit application. Supplied in cases of 16 rolls.



Roll Size	Pack Qty	Order Code
20cm x 76m	16	-2900Q



NEW



Heavy Duty Perforated Rolls

Highly absorbent. high strength. 25cm sheet width for general hygiene use. Also suitable for light workshop, industrial, medical and veterinary applications where a stronger towel is required.

'Hygiene' Blue
100 sheets per roll.



Description	Pack Qty	Order Code
2 Ply Hygiene Blue	24	-2950R




Workshop Rolls

'Floorstand'

Long lasting 2 and 3 ply paper towels. For use with floorstands or similar dispensers. Perforated and unperforated. Unperforated - cut to size to suit application. Suitable for workshops, food processing and automotive industries.

2 ply rolls: for general use.

3 ply rolls: for heavy duty process wiping, wiping of tools and equipment. With superb strength and absorbency characteristics.

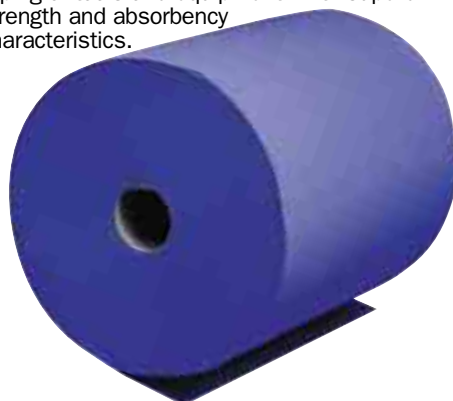


Description	Pack Qty	Order Code
2 Ply White Perf	2	-2730M
2 Ply White Perf	2	-2790D
2 Ply White	2	-2860B
2 Ply White Perf	2	-2850S
2 Ply Blue Perf	2	-2760A
2 Ply Blue	2	-2800N
3 Ply Blue	1	-2820P



Maintenance & Personal Protection



- Exceptional, effective and economical protection for all kinds of products.
- Ideal protection for machined components during production and storage.
 - Also widely used to protect ceramics, glass and other fragile components/products through storage and distribution.
 - Designed to help prevent both surface and impact damage.
 - 'Cushion' products during transportation.
 - 6 colour-coded sizes.
 - High stretch capability handles products/components up to 400mm diameter.
 - Exceptional formability and flexibility means irregular and intricate shapes can be protected.
 - Supplied in purpose designed dispenser cartons.

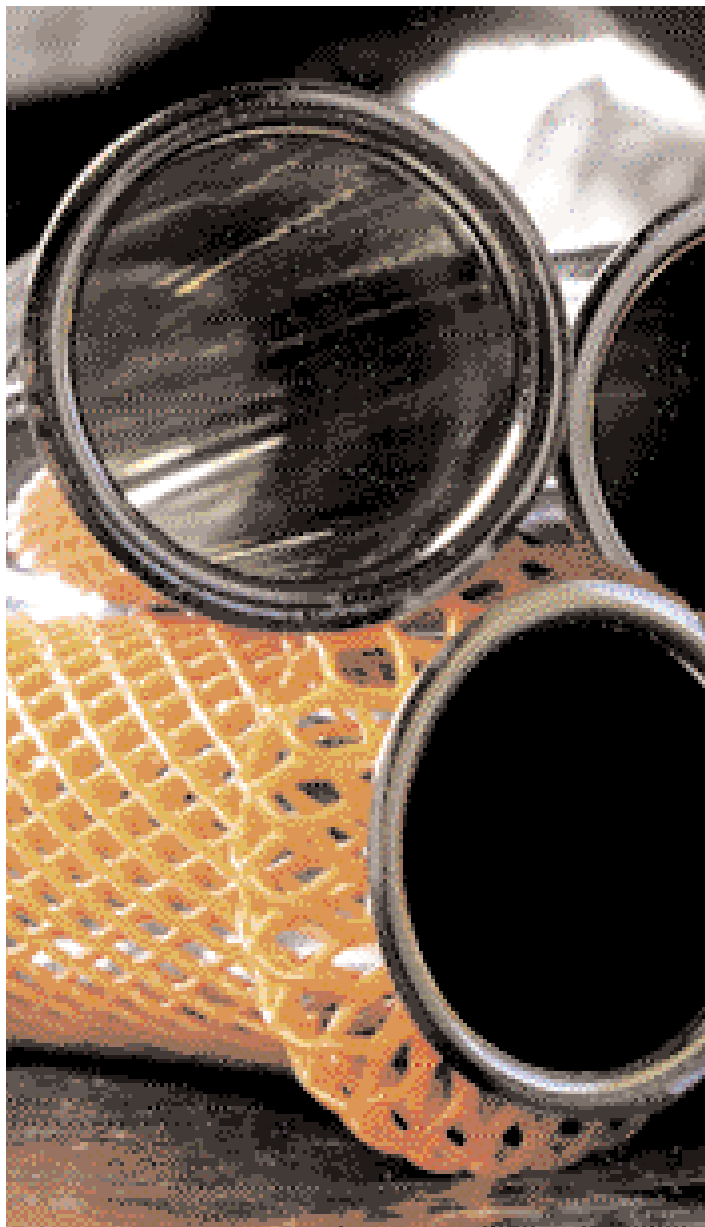

Maintenance & Personal Protection

Sampling
We will be pleased to supply samples of Avon protective sleeving for assessment. **Please contact your local branch.**

Universal Sample Boxes **AVN-956-2000K**

Colour	Diameter Range	Overall Length	Order Code AVN-956
Orange	6 - 17	250m Reel	-4260K
Black	10 - 25	250m Reel	-4130K
Violet	25 - 60	50m Reel	-5500K
Red	50 - 100	50m Reel	-4060K
Yellow	100 - 200	50m Reel	-4800K
Royal Blue	200 - 400	50m Reel	-5000K

Superior Protective Sleevings



- Sleevings is manufactured from inert and chemical-resistance polymers.
- Neat and easy to use at any stage of the manufacturing/distribution process.
- Can stay in place through to end use and can 'add value' at retail.
- Heavy gauge/small aperture. • High level protection.
- 11 colour-coded sizes. • Tried and tested over many years.



Colour	Diameter Range	Overall Length	Order Code AVN-956
Red	6 - 13	50m Hank	-0060K
Black	13 - 26	50m Hank	-0130K
Orange	26 - 40	25m Reel	-0260K
Brown	40 - 50	25m Reel	-0400K
White	50 - 65	25m Reel	-0500K
Grey	65 - 80	25m Reel	-0650K
Yellow	80 - 100	25m Reel	-0800K
Blue	100 - 125	25m Reel	-1000K
Green	125 - 160	25m Reel	-1250K
Straw	160 - 190	25m Reel	-1600K
Royal Blue	190 - 225	25m Reel	-1900K

High Stretch

Colour	Diameter Range	Overall Length	Order Code AVN-956
Pink	20 - 45	50m Hank	-2200K
Purple	40 - 80	50m Reels	-2400K
Green	75 - 125	25m Reels	-2750K

Stillage Separators

- Ideal protection for components stored or shipped in stillages.
- Produced from tough, durable polyethylene.
- Oil and chemical resistant.
- Open mesh design allows oil and swarf to drain through.
- Roll size: 1m x 50m.



Roll Size	Order Code AVN-956
1m x 50m	-2100K